



Horne Engineering Ltd  
 Rankine Street  
 Johnstone PA5 8BG  
 Tel: 01505 321455  
 technical@horne.co.uk  
 www.horne.co.uk

## HORNE TIMED FLOW CONTROL THERMOSTATIC SHOWER PANEL FOR SURFACE MOUNTING

### INSTALLATION, COMMISSIONING & MAINTENANCE INSTRUCTIONS

These instructions (L-84) cover the HORNE range of pre-plumbed shower panels with PUSH-BUTTON flow control ONLY. There are separate instructions for panels with push-button flow control and a rotary knob for temperature control (L-178), and also for those with dual rotary controls (L-180, L-189).

#### 0.1 Approvals

The Horne-15 TMV is independently tested & approved by an ISO 17025 Accredited Test House to all the requirements of Department of Health - HTM 04-01: Supplement Performance Specification D 08: Thermostatic Mixing Valves (Healthcare Premises), to the following designations and for the following applications:

HP-S	Shower with supply pressures of 1 – 5Bar and unrestricted flow rate
LP-S	Shower with supply pressures of 0.2 – 1Bar and unrestricted flow rate

It also complies with Regulation 4 of the Water Supply (Water Fittings) Regulations 1999.

#### 0.2 Backflow Prevention

The hot and cold inlets to the Horne-15 valve are fitted with single in-line Reg 4 approved DN15 Check Valves.

#### 0.3 Supply Water Pressure Requirements

The minimum water pressure required to achieve a spray at the spray head is a dynamic head of 5m (8 psi, 0.5Bar) at the spray head.

Note that dynamic head is measured with the water running.

Where the shower panel is fed by supplies with differing pressures, a pressure-reducing valve (PRV) may be required on the inlet with the higher pressure. If the lower inlet pressure is low enough (typically lower than 1Bar dynamic) that the flow-regulator in the outlet fitting (see pages 11-13) can be removed, then a PRV should not be required. If the lower of the 2 supply pressures is higher than around 1Bar, then a flow-regulator will likely be required to control flow. If the flow-regulator is installed, and the supply pressures are substantially unbalanced, then a PRV could also be needed to prevent pulsing of the flow. Although this has minimal effect on thermostatic control, the flow pulsing is often considered undesirable.

Note that output flowrate is always determined by the lower of the two inlet pressures.

#### 0.4 Operating Conditions Required for TMV Type 3 Compliant Installations

	Low Pressure	High Pressure
Maximum Static Pressure	10Bar	10Bar
Flow Pressure, Hot & Cold	0.5-1Bar	1 to 5Bar
Hot Water Supply Temperature	55 – 65°C	55 – 65°C
Cold Water Supply Temperature	5 – 20°C	5 – 20°C
Minimum Temperature Differential (Hot/Mixed, Mixed/Cold)	5K (=5°C)	5K (=5°C)

**OUTSIDE THESE CONDITIONS OF USE VALVES CANNOT BE EXPECTED TO OPERATE AS TYPE 3 VALVES.**

**0.5 Temperature Adjustment Range**

The mixed water temperature can be adjusted from cool through to a top limit (which can be preset during installation – factory set to approx. 41°C - with full anti-scald protection throughout the range).

**0.6 Water and Energy Conservation**

The TSV1 range shower panels are fitted at the factory with flow regulators at the shower outlet to reduce the flow rate and conserve water and energy. The drawings at the end of this document provide information for accessing the flow restrictors/regulators for removal or replacement.

**0.7 Alternative Water Entry**

Note that panels with rear water-entry, with flexible soft-PEX hoses are also available. More specific instructions for installation of these panels is given at the end of the installation section.

**0.8 Adjustment of Flow Duration**

The Timed Flow Control Cartridge supplied with all variants has an adjustable duration, and is factory set to 45 seconds (maximum duration). This is adjusted using the supplied Hex Key through the hole in the front of the Push-button. See Drawing PA713 on pages 15-16.

**SECTION 1: INSTALLATION**

The surface mounting enclosure is supplied with fixings to attach it to a wall. However, consideration should be given to the type of wall fittings required, as different substrates will require different fittings. It is the responsibility of the installer to ensure that the fixings used are appropriate for the wall substrate.

The hot pipe is on the left, and cold on the right, when viewed from the user’s perspective.

**1.1 Recommended Mounting Heights – Guidance Only**

T109 / T307 Panel	Support screw should be 2.0 metres from finished floor level*.
T306 Panel (swivel-head, shown page 13)	Support screw should be 2.1 metres from finished floor level.

\* For accessible and Changing Places installations, please refer to Building Regulations Doc M and BS8300 for appropriate guidance.

**1.2 Mark the position for the panel**

Identify a suitable position for the pre-plumbed enclosure and mark a spot for the support screw on the wall on the centreline of where the panel is to go, at the height indicated in the table above.

**1.3 Install the Support Screw**

Drill a hole in the wall and insert a wall plug and screw (7mm hole if using the supplied plug), leaving the head of the screw protruding approximately 12mm from the wall. Note that a corrosion resistant stainless-steel screw is supplied for this purpose.

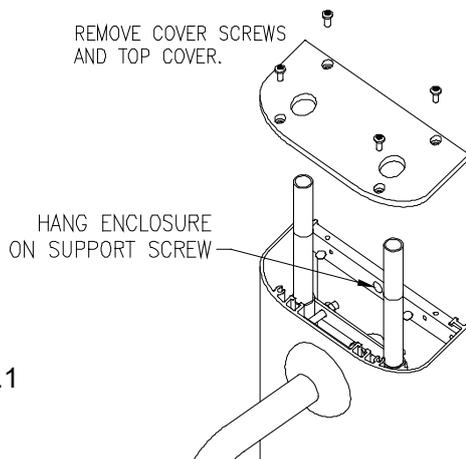


Fig.1

**1.4 Hang the Enclosure on the Support Screw**

Except where the panel includes an integral ILTUDU, release the top cover of the pre-plumbed enclosure by removing the four screws. Hang the pre-plumbed enclosure on the support screw by the larger hole in the middle of the back strap and let this take the weight of the enclosure.

**1.5 Mark out the Four Support Holes**

Ensure that the enclosure is hanging true and then mark out the holes for the 2 upper support screws. Remove the bottom cover of the pre-plumbed enclosure and mark out the 2 lower support screws (See Fig. 2).

**1.6 Drill Support Holes**

Carefully remove the pre-plumbed enclosure from the temporary support screw and, being careful not to scratch the enclosure or its covers, lay it down where it will not be damaged. Drill 4 x support holes (7mm for the supplied plugs) to mount the panel.

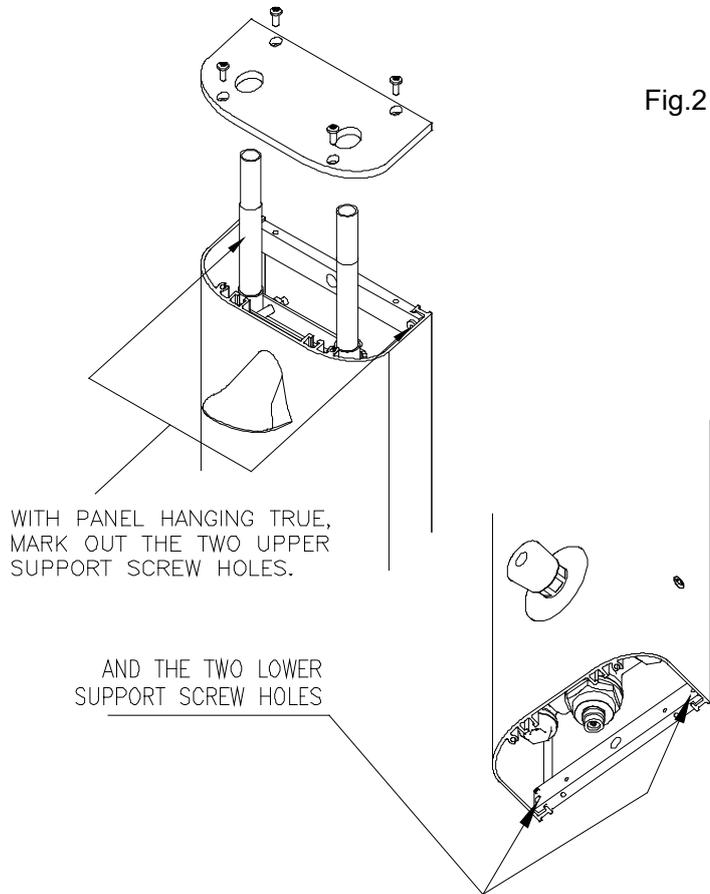


Fig.2

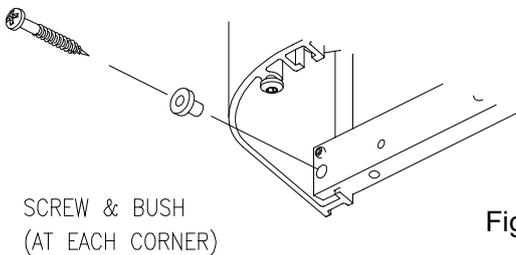


Fig.3

**1.7 Attach the Unit to the Wall**

Carefully re-hang the pre-plumbed enclosure on the temporary screw. Put the 4 supplied screw bushes in the mounting holes in the panel and then attach the panel firmly to the wall using 4 stainless-steel screws. A bead of silicon mastic can be used, if required, to cover any gaps behind the panel on uneven walls. Do not mastic the lower End Cap to the wall.

N.B. It is important to use the supplied screw bushes.

### 1.8 Connect the Supply Pipes

N.B. Except where the panel includes an integral ILTDY, ensure that the top cover of the pre-plumbed enclosure is replaced prior to connecting up the supply pipes. The fitting of isolation valves is required as close as practicable to the water supplies inlets of the shower panel.

Connect the hot water supply to the left-side inlet, and cold water to the right-side inlet (See Fig. 4).

**DO NOT OPEN THE WATER SUPPLIES AT THIS STAGE AS THEY HAVE NOT BEEN FLUSHED OUT TO REMOVE THE DEBRIS IN THE PIPEWORK. SUCH DEBRIS CAN DAMAGE THE THERMOSTATIC VALVE**

### 1.9 Flush the Pipework

Flush out the pipework in accordance with Water Bylaws 2014 (Scotland) and BS EN 806. The use of a Horne flushing kit is strongly recommended, because this connects directly to the water inlets to the mixing valve. See Figs. 5 and 6.

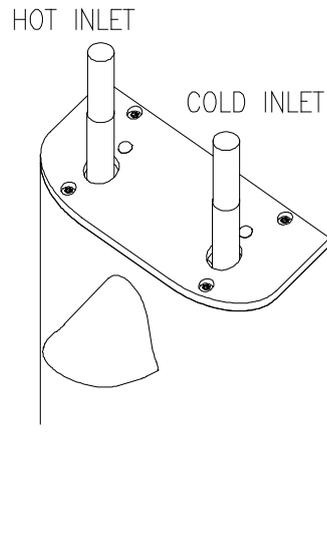


Fig.4

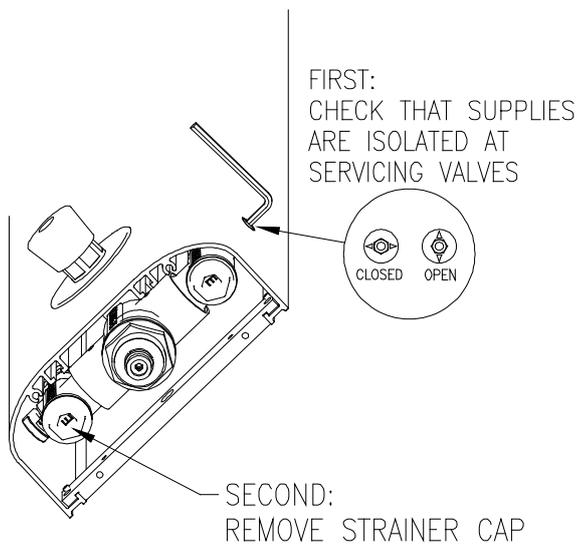


Fig.5

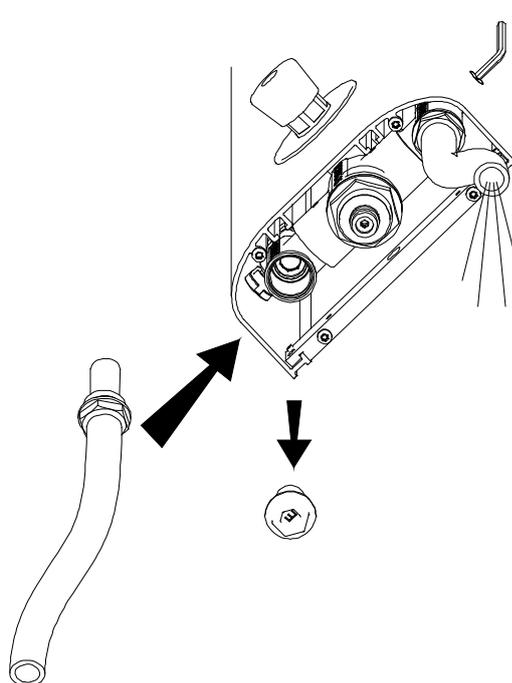


Fig. 6

Access to the flushing points is gained from underneath the casing through the lower end cap. Isolate the water using the low-level servicing valves located on the side of the panel (Fig. 5) using a 4mm hex key. Remove the strainer cap with the strainer basket and screw in the flushing adapter. Place the end of the flushing hose in a drain or container and turn on the supply to flush AT FULL BORE until any pipework which has been worked on is cleared. After flushing, remove the flushing adapter and replace the strainer cap. Repeat for both hot and cold supplies. See Figs. 5 and 6.

**NOTE THAT IF THE SYSTEM IS NOT TO BE COMMISSIONED IMMEDIATELY AND/OR THERE IS ANY DANGER OF FREEZING THEN THE PIPES AND VALVE MUST BE DRAINED TO AVOID DAMAGE. OPEN THE STRAINER CAPS FOR THIS PURPOSE.**

### **1.10 Test for Leaks in Pipework**

Ensure that the push-button control is not depressed and open the supplies. Open the servicing valves on the casing (Fig.5) and check for any water leaks upstream of the thermostatic valve. Make good any leaks found. The valve is now ready for commissioning.

Note that if the controls, enclosure and shower accessories require cleaning then care must be taken not to scratch them in the process. Wash off any surface dust with the shower spray before cleaning with soapy water.

**DO NOT USE ANY ABRASIVE CLEANERS OR SOLVENTS OR THE SURFACES MAY BE DAMAGED.**

### **1.11 Supplementary Installation Instructions for ...B Variants [Hose Inlets from Rear].**

H15-TFC shower panels are available in versions with flexible braided stainless steel inlet hoses rather than top entry copper pipework. The hoses used are UK Water Reg 4 Approved SOFT-PEX (cross-linked polyethylene). They are not EPDM lined. These shower versions have Product Reference codes with the suffix B, e.g. T306B.

The main difference, from an installation point of view, is that the water supplies may have to be connected before the pre-plumbed enclosure is attached to the wall. Accordingly, point 7 on the attached installation instructions (Connect the Supply Pipes) should be performed before point 6 (Attach the Pre-Plumbed panel to the Wall) unless alternative access is available to the connections, e.g. via an access panel.

Note that the braided hose inlets are colour coded with BLUE for the Cold Water Supply and RED for the Hot Water Supply.

Care should be taken to ensure that the weight of the pre-plumbed enclosure is taken by the mounting screws and NOT by the hoses.

## **SECTION 2: COMMISSIONING**

Commissioning the unit involves flushing the water supply; setting the temperature; and finally performing a cold-water isolation test to confirm the safe operation of the thermostatic valve as fitted. Flushing is included in the Installation section to ensure it is done as soon as possible after installation but should be considered vital to the commissioning process. Commissioning is essential to establish a reference point for future in-service tests, and to ensure the thermostatic valve works correctly under site conditions.

### **2.1 Flushing**

Unless you are absolutely certain that this has been done, flush the pipework: see section 1.9 above.

### **2.2 Pre-Checks**

Ensure that the NHS designation of the valve matches the intended application, that both hot and cold-water supplies are open and at, or near, their design temperatures and pressures, that they are within the requirements of the valve as outlined in section 0.4. Also ensure that the servicing valves are open.


### **2.3 Temperature Setting**

The Horne 15 is set in the factory to verify correct good thermostatic performance, but this must be checked on site during commissioning to ensure that the site conditions do not impair the operation of the valve. If necessary, reset the maximum outlet temperature to 41°C.

2.3.1 Run the shower by pushing the button. For installations with a fixed shower head, putting a burst polythene bag over the shower head will help to catch and deflect the spray during commissioning.

2.3.2 Keep the push-button depressed for as long as needed until the water temperature has stabilised. Should the temperature rise, or drop, in an uncontrolled fashion, then the hot and cold supplies are probably reversed. Correct this before proceeding.

- 2.3.3 Remove the lower end cap from the shower Enclosure by removing the four screws.
- 2.3.4 Using a 4mm (or 5/32") hex key, adjust the temperature of the mixed water. Turn the screw anticlockwise to increase the temperature, or clockwise to reduce it. See fig.6.

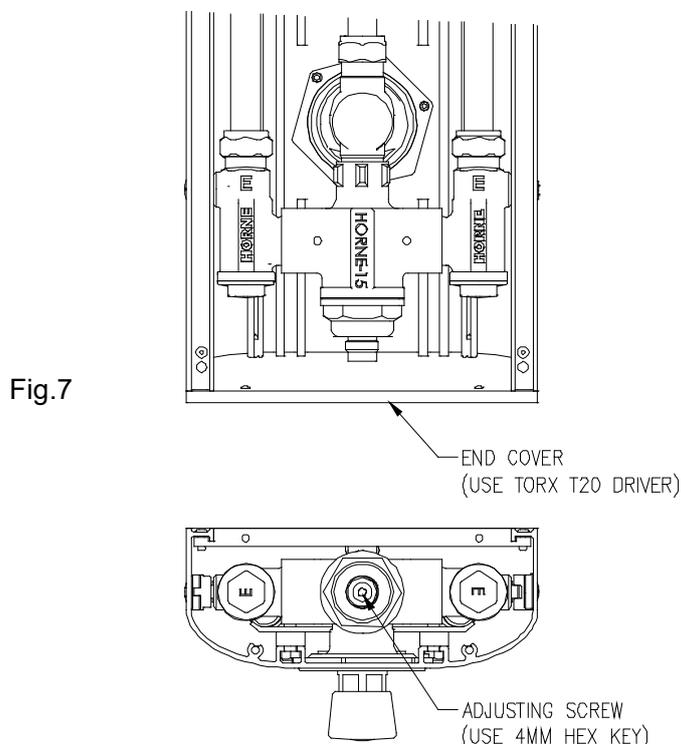

- 2.3.5 During commissioning, the valve **MUST** be adjusted **DOWN** to temperature. This is to ensure that the hot water system is capable of supplying water, at the working flowrate, in excess of the required outlet temperature by a margin of at least 5°C. Note that this is not always the case with instantaneous water-heaters. To do this, set the valve to 5°C higher than required; measure and confirm the elevated temperature, and then reduce the temperature to the required level. If the valve cannot be set to 5°C higher than required, then the outlet temperature is being controlled by the inlet conditions and not safely by the valve, therefore the commissioning is not complete, and **VULNERABLE USERS SHOULD NOT BE ALLOWED TO OPERATE THE SHOWER.**
- 2.3.6 After each adjustment, isolate the **HOT** supply at the servicing valve for a few seconds, restore it and check the set temperature.
- 2.3.7 Operate the shower a few times to ensure the set temperature is correct.
- 2.3.8 Record the commissioning details on the attached maintenance sheet (page 12 of this document) to permit the in-service performance of the valve to be assessed.

#### **2.4 D08 Compliance**

Note that, to comply with D08, the final stabilised Mixed Water Temperature should not exceed 43°C. Record the commissioning information, including equipment used, on the attached commissioning sheet to permit the in-service performance of the valve to be assessed in the future.

#### **2.5 Cold Isolation Test**

- 2.5.1 Finally, check the thermal shut-off facility of the TMV by performing a Cold Isolation Test (sometimes colloquially called a “fail-safe” test) as follows. With the shower running full, close the cold (i.e. right side) servicing valve. [The Servicing Valve is closed when the arrows are in the horizontal position, and open when they are in the vertical position: see Fig. 6]. If there is any flow after 5 seconds, this must amount to no more than 120ml in 60 seconds of collecting. If there is more than this amount, find possible corrective actions in the “Maintenance” section below. If the Cold Isolation Test is satisfactory,

restore the supply and note the final stabilised temperature in the commissioning log. This should be within 2°C of the original temperature, and must not exceed 43°C. Generally, the mixed water temperature should not rise by more than 2.9°C during this cold-water isolation test. Record the result of this on the attached commissioning sheet. Check that the button is pushed-in during the entirety of this test, or the results will be invalid (no-flow without the button pressed is not a surprise!).

Note that the incoming hot-water temperature must be maintained in the range described in the table at the bottom of page 1 for this test to be valid. Refer to the maintenance section of this booklet or phone the factory for advice, if necessary.

For installations with a fixed shower head, putting a burst polythene bag over the shower head will help to catch and deflect the spray and avoid getting wet.

## **2.6 Test the Check-Valves**

Although check-valve failures are rare, verifying their operation at commissioning time in a large installation can give peace of mind later. Refer to section 3.9 .

# **SECTION 3: MAINTENANCE**

Maintenance of all Thermostatic Mixing Valves is essential to ensure the product continues to perform to specification after installation and continues to afford scald protection. Record all maintenance carried out on the attached commissioning and maintenance record.

## **3.1 In-Service Testing**

Periodic testing should be carried out to check whether any deterioration has occurred in the performance of the shower valve. The results of these tests, and the equipment used, should be recorded on the Commissioning, Maintenance and In-Service Testing Sheet at the back of these instructions. Fill in all the parameters requested on the sheet.

Note that instrumentation to the same specification should be used each time when measurements are taken to ensure consistency of results. Record all the information on the In-Service Testing sheet at the back of these instructions.

Also record any requirement to adjust the Mixed Water Temperature on the in-service testing record.

***NOTE: A THERMOSTATIC MIXING VALVE IN NEED OF MAINTENANCE CAN BE UNDETECTABLE IN NORMAL USE AND ONLY BECOME APPARENT WHEN DISRUPTION OCCURS IN THE HOT OR COLD-WATER SUPPLY TEMPERATURES OR PRESSURES. IN SERVICE TESTING SHOULD BE CARRIED OUT AT A FREQUENCY DETERMINED BY LOCAL RISK ASSESSMENT TO DETECT ANY SUCH DETERIORATION.***

## **3.2 Routine Servicing**

- 3.2.1 Replace the “O” rings every three years (Maintenance kit with spare “O” rings available). It is especially important to replace the slide-valve seal, located in a groove in the valve body. Horne tool 4411 is helpful for this job. See the Horne website “maintenance” section for further instruction and videos.
- 3.2.2 Replace the Thermostat Element every 6 years, or more often if problems are experienced or in installations where the water is aggressive.
- 3.2.3 Replace the slide-valve assembly if it becomes damaged. This may happen due to scale or grit in the water.

## **3.3 Strainer Baskets**

Initially check the strainer baskets for debris every three months and clean if required. This period can perhaps be increased later if it is established that the water is generally clean and free of debris.

## **3.4 Cold Isolation Test - Corrective Actions for Failure**

- 3.4.1 Regularly perform a Cold Isolation Test and check the maximum temperature setting as described in the “Commissioning” section above. If the valve fails this test then consider the following:
- 3.4.2 Perform an Isolation Test, but shut the hot instead of the cold. If this results in a similar rate of flow as when shutting the cold then consider that there may be a problem with the slide-valve seal. Follow the routine servicing instructions below.

- 3.4.3 Opening and cleaning the valve can cure problems caused by dirt in the pipework which has migrated into the valve, but note that if water cleanliness is poor, or flushing is not carried out, then dirt can damage the slide-valve knife-edge faces. This will necessitate replacement of the slidevalve.
- 3.4.4 Cleaning/dressing of the hot valve seat may be necessary if the valve is old and/or scaled. This can be done with Horne tool 5395, and some toothpaste or fine grinding paste.
- 3.4.5 Failure of the Cold Isolation Test can be caused by hot water in the cold supply: test the check-valves.
- 3.4.6 In the water supply is 'hard', then de-scaling of the valve may be necessary. All rubber parts must be removed prior to de-scaling. Do not forget the Slide Valve Seal located inside the Horne 15 body, which should always be replaced with a new seal after removal. Maintenance kits are available which contain "O" rings and/or the Thermostatic Element. Smear all "O" rings with silicon oil prior to installing them.

### **3.5 Timed Flow Control**

- 3.5.1 The Timed Flow Control Cartridge supplied with all variants has an adjustable duration, and is factory set to 45 seconds (maximum duration). This is adjusted using the supplied Hex Key through the hole in the front of the push button - see drawing PA713 below.
- 3.5.2 If the duration of the timed flow control begins to shorten or lengthen significantly then this could be a sign that the cartridge requires cleaning. Over a period (or if the water supplies have not been flushed through adequately on a new installation), sediment and other particulate matter can get trapped in the Timed Flow Control and disrupt the timing.
- 3.5.3 The Timed Flow Control (TFC) cartridge can be removed for cleaning or replacement (spare parts are not available) as per drawing PA713 (pages 15-16).
- 3.5.4 NB: For -LR models, which include a conical shroud around the timed flow control cartridge, the cartridge can only be removed by removing the panel from the wall. To do this, first isolate the water supply upstream of the panel then purge the water from the internal pipework by pressing in and holding the TFC button until the flow stops. Disconnect the shower supply pipes from top entry pipework. Remove the top and bottom cover caps with a TORX T20 driver and unscrew the four wall fixings. Lift the Enclosure from its supporting screw to remove it, being sure to support the panel if there are still supply hoses connected behind. Using a 3mm hex key, loosen the 2 screws holding the LR shroud in place from behind. Now unscrew the TFC cartridge as per drawing PA713.

### **3.6 Notes on Dismantling**

- 3.5.1 All internal components of the thermostatic valve can be removed from the bottom of the panel by removing the components shown in drawing 6353 below. There is no need to remove the panel from the wall unless you wish to remove the valve from the panel, to de-scale it for example.
- 3.5.2 Treat all parts with care when removing them from the valve body. Note especially that the slide-valve is a precision component and can easily be damaged.
- 3.5.3 Do not forget the slide-valve seal, partially hidden in a groove in the valve-body. Horne tool 4411 can be used to remove it. Be careful not to scratch the groove sides whilst removing the seal. This and all other plastic/rubber parts must be removed before de-scaling.

### **3.7 Notes on Descaling (see drawing 6353 below)**

- 3.6.1 If the valve body requires de-scaling, first remove the valve from the panel (see section 3.10 ). Remove all o-ring seals and internal parts, then use a proprietary de-scaling fluid. Do not put the thermostat element or any plastic/rubber parts in de-scaling fluid.
- 3.6.2 Inspect the condition of the "Hot Valve Face", with which the knife-edge of the slidevalve mates, and the "Cold Valve Face". If the valve faces show signs of deterioration, they can be resurfaced as follows.
  - ◇ Re-surface the Hot Valve Face using a mandrel (Horne part no. 5395) and a water-soluble scouring paste (toothpaste works quite well).
  - ◇ Use P800 Grade wet abrasive paper on a flat surface to smooth the "Cold Valve Face" (ie, the end of the cover on which the slide-valve mates).
- 3.6.3 Prior to re-assembly of the valve, ensure it is clean and all debris is removed.

### **3.8 Notes on Re-assembly**

- 3.8.1 Make sure all components are clean before re-assembly. It is recommended to fit new o-rings.

- 3.8.2 Ensure the slide-valve seal is fitted in the body and is in good condition.
- 3.8.3 Smear silicon oil (not grease) on all “O” rings prior to installation. Also lightly smear the outside diameter of the slide-valve with silicon oil before fitting.
- 3.8.4 Fit the components into the valve body using drawing 6353 (below) as a guide.
- 3.8.5 For optimal thermostatic performance, orient the visible tail end of the return spring towards the left side (hot inlet side) before inserting the slide-valve.
- 3.8.6 After any dismantling of the valve, perform a Cold Isolation Test per section 2.4 to verify correct re-assembly.

### **3.9 Testing of Check-Valves**

The Check Valves prevent crossflow between hot and cold-water supplies under unequal pressure conditions and are designed for long life with no maintenance. Their function can be tested as follows:

- 3.9.1 Start with the outlet to the valve closed and both hot and cold isolating valves open.
- 3.9.2 To test the Check Valve on the hot side, shut off the hot supply and ensure the cold supply is open. Be prepared for leakage of trapped water from the pipe and remove the strainer basket on the hot side. Any continuing leakage evident from the strainer body is likely to be coming through the hot supply Check Valve (N.B. Ensure the hot isolating valve shuts off tightly, or it may cause leakage here). Testing of the cold-side check valve is a mirror of this process.
- 3.9.3 If either Check Valve is passing, then the inlet elbow (complete with Check Valve and strainer basket) should be replaced. It is not possible to satisfactorily remove the Check Valve itself from the inlet elbow and this should not be attempted. The shower valve body must be removed from the pre-plumbed enclosure to remove the inlet elbows. Pay attention to the section below on “removal of valve from panel”, and Fig.9.

### **3.10 Removal of Valve from Panel**

If removing the valve from the panel, for example for descaling, then care should be taken over the low-level isolation actuators, which are connected to the valve via spring-loaded Oldham couplings. The 2 parts of the coupling can be held together by M2 screws (part no 41-5667, inserted down the 4mm hex hole), which prevent loss of the very small springs during assembly & disassembly. The complete coupling is part no. 43-5663.

### **3.11 External Cleaning**

When cleaning the external levers or control knobs, use only a soft cloth and soap. Never use cleaners containing abrasives or solvents as they may damage the chrome plating.

### **3.12 Periodicity Of In-Service Testing**

The frequency of in-service testing depends upon the condition of the water passing through the Horne 15. In-service testing must be carried out more frequently in hard water areas than in soft water areas. As a general guide, in-service testing should be carried out at intervals somewhere between 6 and 12 months. In-service testing should be carried out at least every 12 months and, where the water is hard, the interval may be less than 6 months. Experience of local conditions and the in-service testing record will dictate the required frequency of in-service testing. In the absence of practical experience of this, a first check 6 – 8 weeks after commissioning should be performed. If no problems are detected (and mixed water temp is within 1°C of the commissioning temp) then checking again 12 – 15 weeks after commissioning to help build up a history. The results should be recorded on the attached sheet. Any requirement to reset the mixed water temperature should be noted. If no such adjustments are required, then the next in-service tests can be scheduled for 24 – 28 weeks after commissioning. If small adjustments (1 to 2 K) are required then check the strainers for cleanliness, make sure the isolating valves are fully open and verify the check valves are operating correctly (see Maintenance Section). The next in-service test should be conducted 18 - 21 weeks after commissioning. If larger adjustments are required (>2K), then service work is required, and the in-service tests should be repeated 18 – 21 weeks after commissioning. Note that the pressure and temperatures of the supplies must be identical to those during commissioning for the in-service tests to be meaningful.


TYPE NUMBER

TO ORDER SPARE PARTS

REFER TO: TYPE NUMBER  
PART REF. No.  
PART NAME  
THIS DRAWING No.

e.g. :  
SPARES FOR VALVE TYPE H-1503  
THERMOSTAT ELEMENT  
No. 8, DR'G. No. 6353/2

STRAINER COUPLING

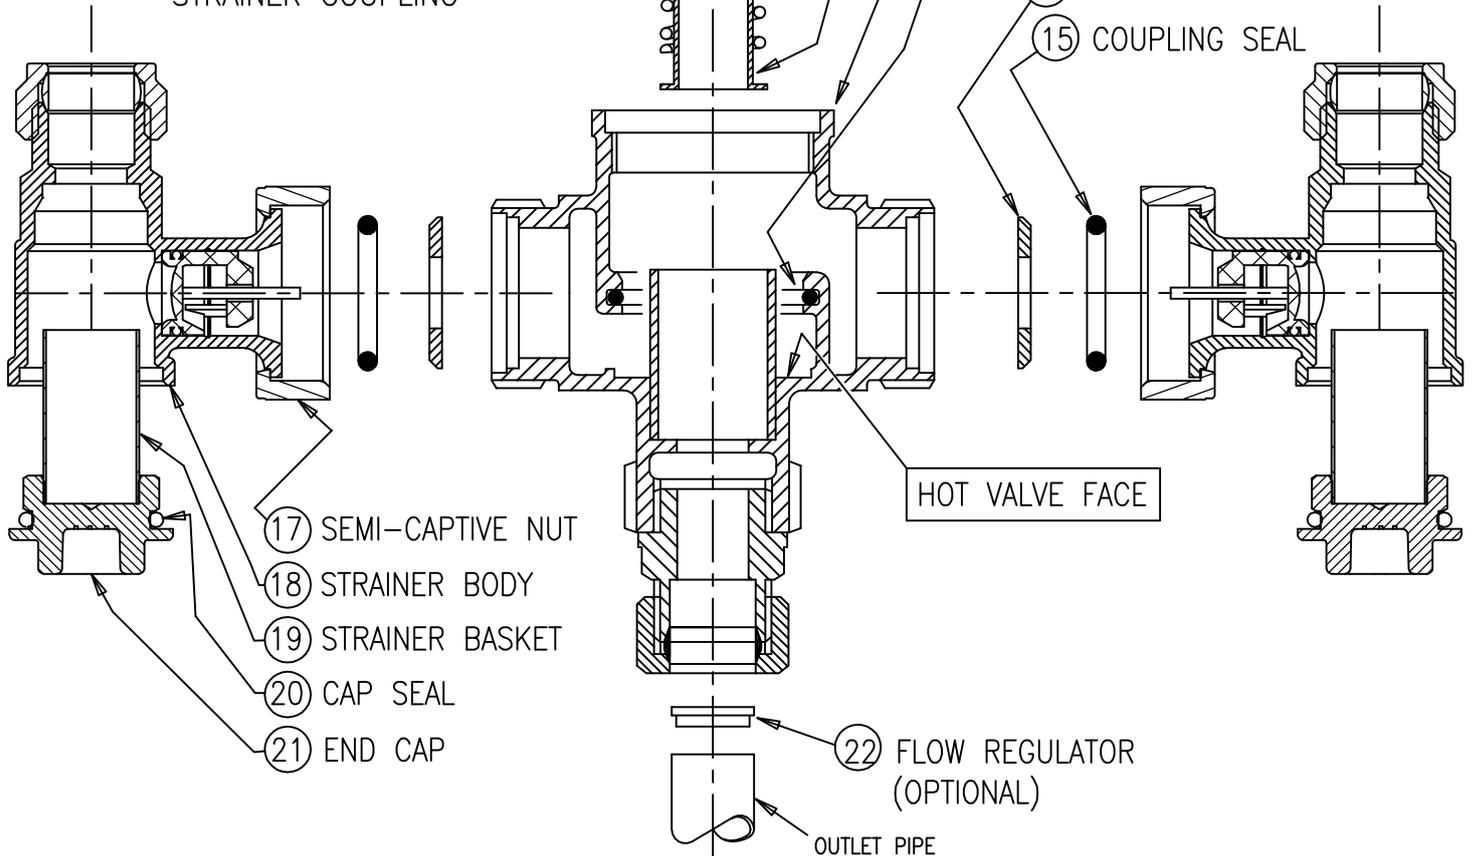

TO REMOVE FLOW REGULATOR


- 1> REMOVE THE 2 CAPHEAD SCREWS (USING 3MM HEX KEY)
- 2> PRISE SPRAYPLATE OUT WITH A BLADE OR SIMILAR
- 3> REMOVE THE RETAINING RING
- 4> REMOVE FLOW REGULATOR WITH ITS O-RING

STEPS <3> AND <4> CAN BE DONE BY TURNING ON THE WATER SUPPLY AND CATCHING THE PARTS IN A BUCKET

TO RE-FIT FLOW REGULATOR

- 1> INSERT FLOWREG INTO HOLE, FLANGED SIDE UP (FACING THE WATER SUPPLY)
- 2> PUSH O-RING INTO GAP AROUND FLOWREG
- 3> INSERT RETAINING RING
- 4> FIT THE LARGE O-RING ONTO THE SPRAYPLATE AND FIT THE SPRAYPLATE
- 5> RE-FIT THE CAPHEAD SCREWS

NOTE THAT THE SPRAY PLATE CAN BE FITTED IN 2 DIFFERENT ORIENTATIONS TO ALLOW GREATER OR LESSER 'THROW' OF THE WATER.

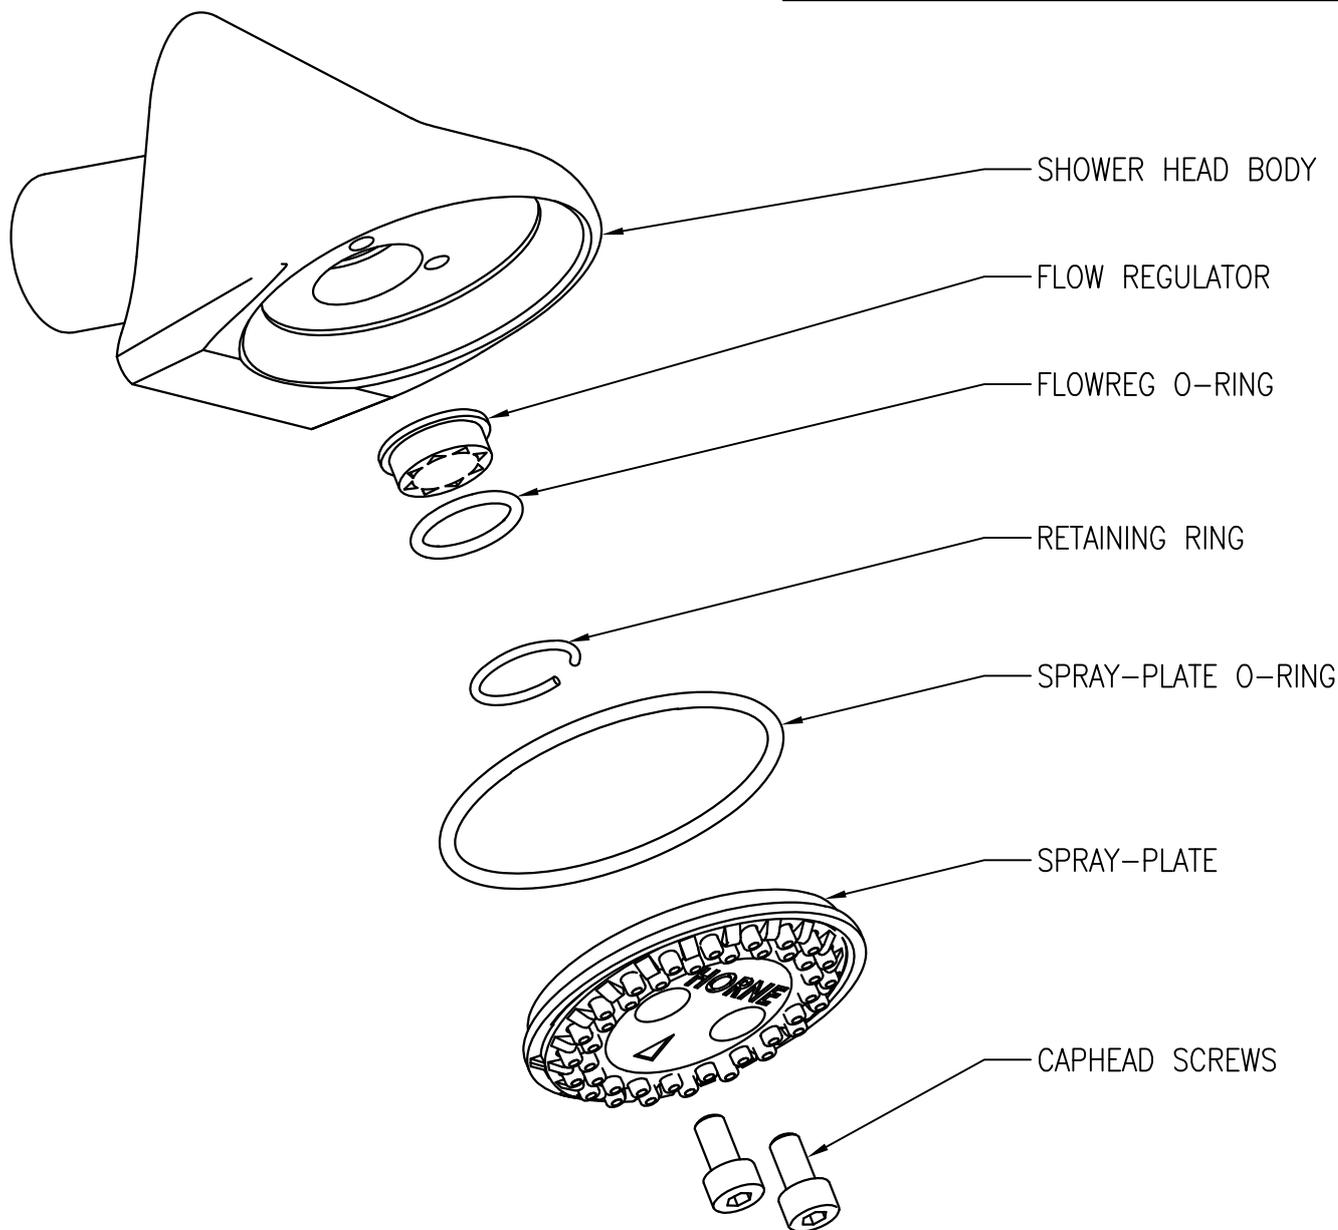

COPYRIGHT 2012, HORNE ENGINEERING LTD. ALL REPRODUCTION PROHIBITED UNLESS AUTHORISED IN WRITING

		MATERIAL : MATERIAL SPECIFICATION		HORNE ENGINEERING LTD. JOHNSTONE RENFREWSHIRE	
PART : REMOVAL / REPLACEMENT OF FLOW REGULATOR (VANDAL RESISTANT HEAD)	PRODUCT : HORNE SHOWER PANELS	SCALE	DO NOT SCALE	DR'G. No. 10393	
		DRAWN	MJ (18/11/2013)		
		CHECKED			
		ISSUE	2		



TO REMOVE FLOW-REGULATOR

1. UNSCREW SPRAY-HEAD FROM ANGLED TUBE
2. REMOVE FLOW REGULATOR AND WASHER
3. REPLACE WASHER
4. REFIT SPRAY-HEAD

TO FIT FLOW-REGULATOR

1. UNSCREW SPRAY-HEAD
2. REMOVE THICK WASHER FROM ASSEMBLY AND FIT FLOW-REGULATOR INSIDE IT (NOTE FLOW DIRECTION)
3. FIT FLOW-REGULATOR AND THICK WASHER TO SPOUT
4. SCREW THE SPRAY-HEAD TO THE SPOUT.

\*\* THE EXACT NUMBER AND THICKNESS OF WASHERS WILL DEPEND ON WHICH SWIVEL-HEAD IS FITTED.

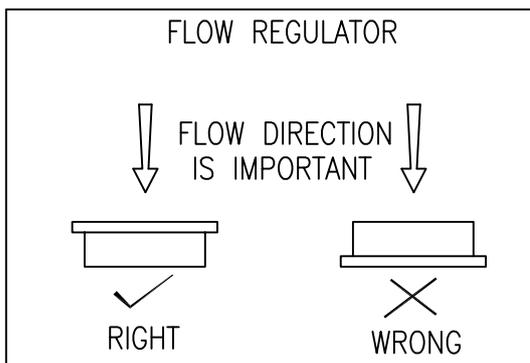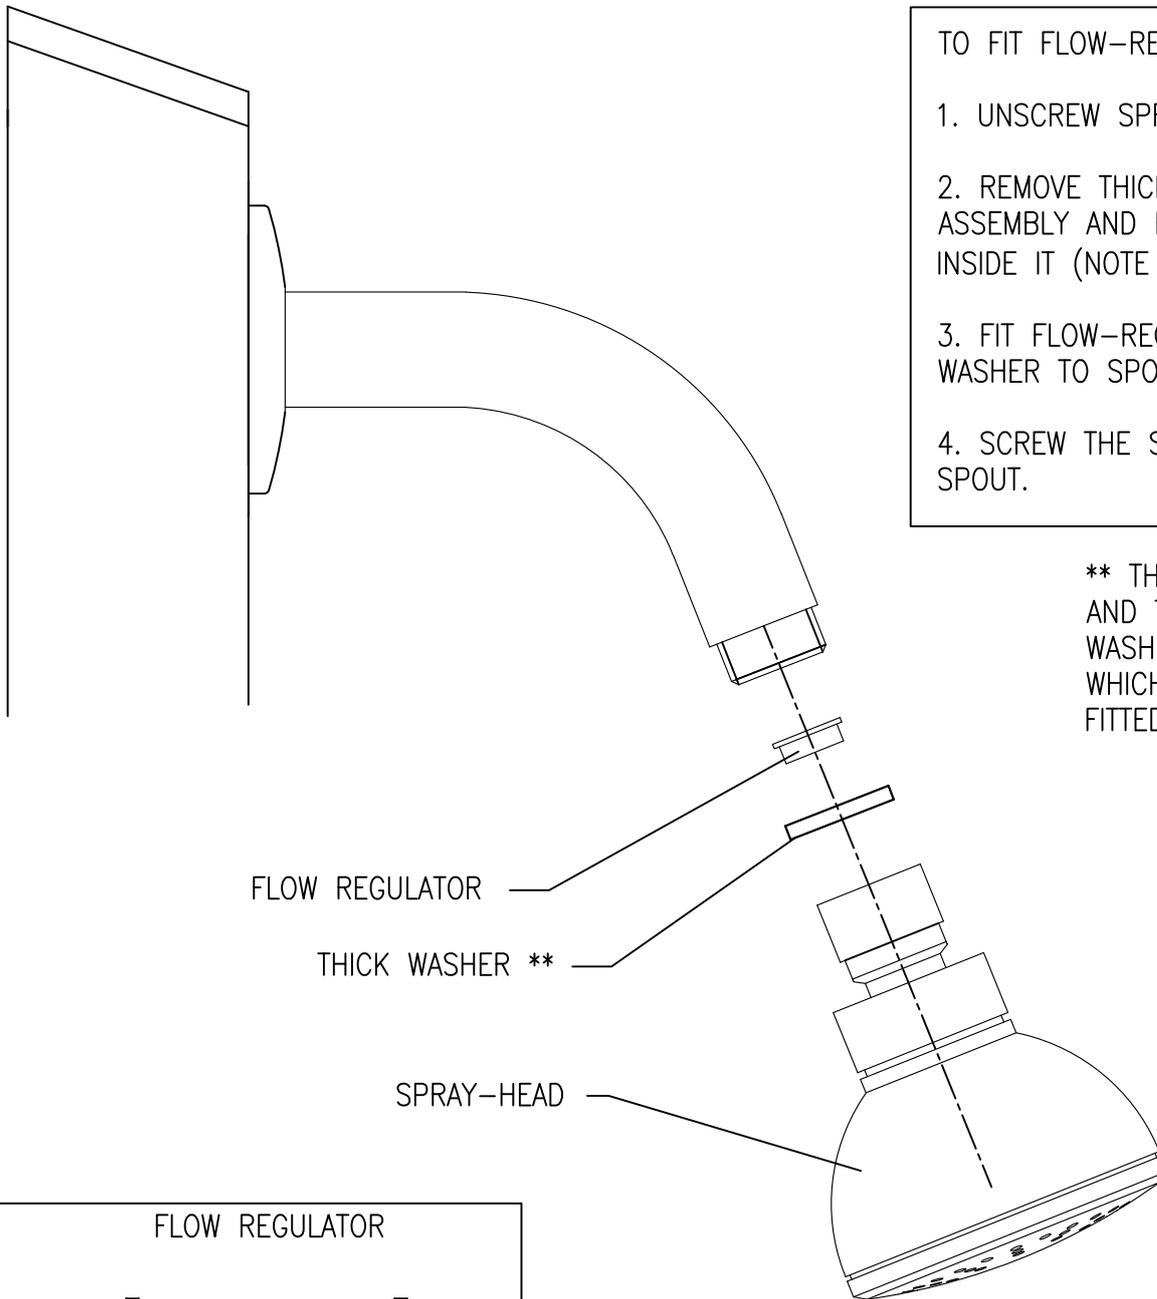

COPYRIGHT 2016, HORNE ENGINEERING LTD. ALL REPRODUCTION PROHIBITED UNLESS AUTHORISED IN WRITING

MATERIAL : N/A


HORNE ENGINEERING LTD.  
JOHNSTONE  
RENFREWSHIRE

PART :  
REMOVAL/REPLACEMENT OF  
FLOW REGULATOR

PRODUCT :  
TSV1-106A/AB


SCALE	DO NOT SCALE
DRAWN	MJ (1/12/2020)
CHECKED	
ISSUE	5

DR'G. No. 9301B

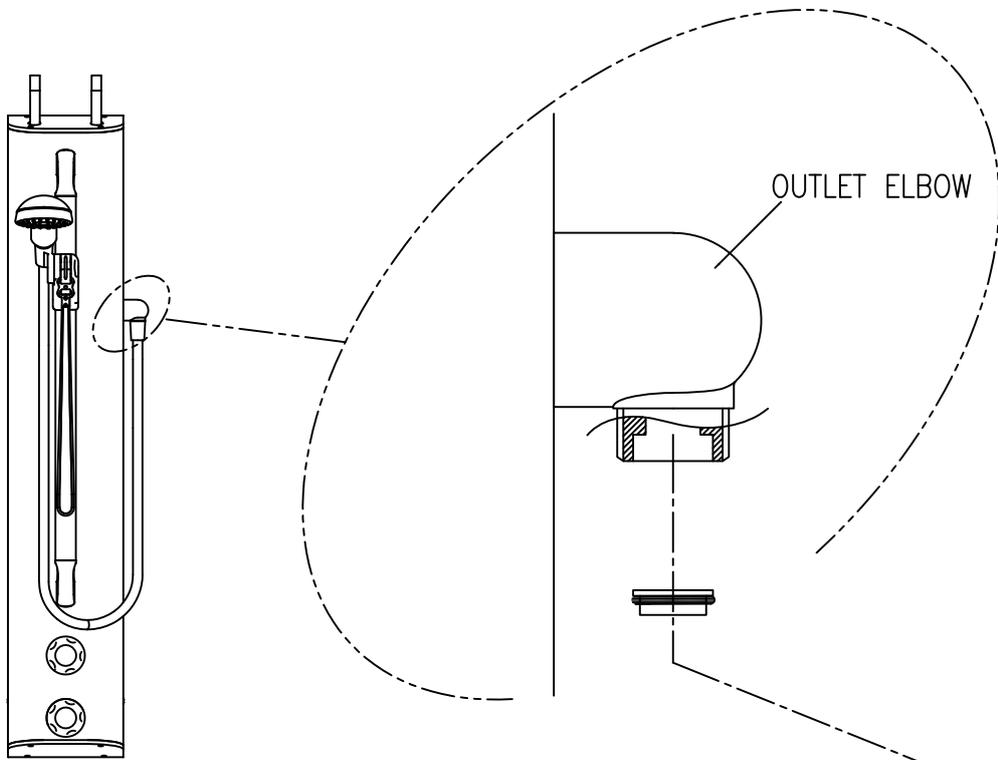

TO REMOVE/REPLACE THE FLOW REGULATOR

1. UNSCREW SHOWER HOSE FROM FIXED END
2. REMOVE, OR REPLACE REGULATOR (WITH O-RING ATTACHED, INTO THE OUTLET ELBOW, FLANGED SIDE FIRST IF REPLACING)
3. ENSURE THAT THE O-RING IS SEATED EVENLY IF REPLACING REGULATOR
4. RE-ATTACH SHOWER HOSE

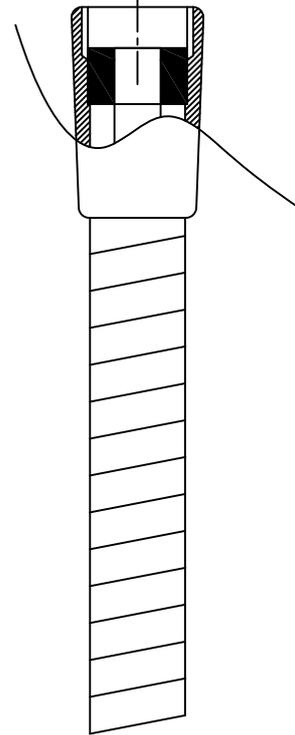

NOTE:  
IF REPLACING,  
FLOW DIRECTION  
IS IMPORTANT



RIGHT



WRONG

COPYRIGHT 2003, HORNE ENGINEERING LTD. ALL REPRODUCTION PROHIBITED UNLESS AUTHORISED IN WRITING

MATERIAL : N/A

HORNE ENGINEERING LTD.  
JOHNSTONE  
RENFREWSHIRE

PART :  
FLOW REGULATOR  
REMOVAL/REPLACEMENT  
INSTRUCTIONS

PRODUCT :  
HORNE SHOWERS  
ALL HANDSET MODELS

SCALE	DO NOT SCALE
DRAWN	GDP 7/12/05
CHECKED	
ISSUE	3


DR'G. No. 9302B

INSTRUCTIONS SPECIFIC TO SHOWER UNITS WITH RISER RAIL

TO ADJUST STIFFNESS OF ROTATING HANDSET HOLDER...




PRIZE DECAL COVER OFF HERE

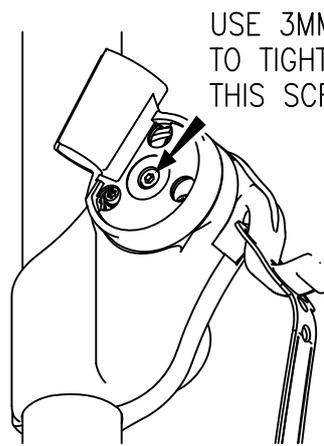


USE 3MM HEX KEY TO TIGHTEN OR LOOSEN THIS SCREW.


TO FIT THE DESCENDER (FOR ACCESSIBILITY)

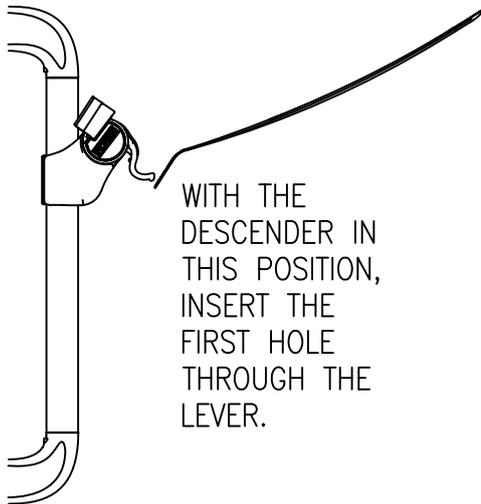

WITH THE DESCENDER IN THIS POSITION, INSERT THE FIRST HOLE THROUGH THE LEVER.

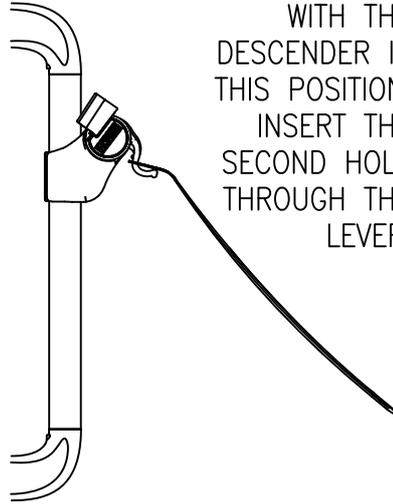


WITH THE DESCENDER IN THIS POSITION, INSERT THE SECOND HOLE THROUGH THE LEVER.

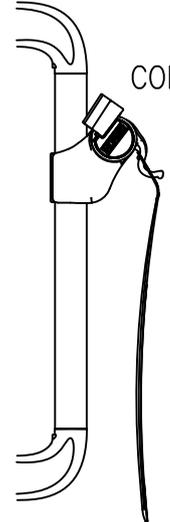

COMPLETE

TO REMOVE HANDSET HOLDER FROM THE RAIL, FIRST REMOVE DECAL COVER (SEE ABOVE), THEN USE TORX T15 DRIVER TO REMOVE THE 3 SCREWS AND THE ROTATING STIRRUP. REMOVE SCREW-COVER\* AND SCREW FROM REVERSE OF HANDSET HOLDER, THEN INSERT A 50MM LONG X 3MM DIAMETER ROD (SCREWDRIVER) INTO THE HOLE AS SHOWN. HANDSET HOLDER WILL THEN SPLIT APART AND CAN BE REMOVED FROM THE RAIL.

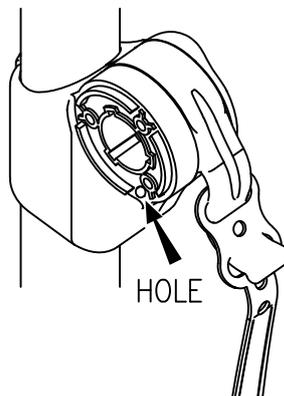

HOLE

MAXIMUM LOADINGS FOR THE SHOWER RAIL (WHEN USED AS A GRAB-RAIL):-

LENGTH BETWEEN MOUNTING CENTRES	MAX. LOAD
0.8 M	120Kg
0.675 M	150Kg
0.39M	200Kg
0.29M	200Kg


\* DRILL A SMALL HOLE THOUGH SCREW-COVER TO REMOVE IT.

HORNE ENGINEERING LTD.  
JOHNSTONE  
RENFREWSHIRE

DR'G. No. 11399


HORNE ENGINEERING LTD, RANKINE STREET, JOHNSTONE. PA5 8BD  
 INSTRUCTION SHEET FOR ADJUSTING FLOW DURATION CUP  
 TSV1 TIMED FLOW CONTROL UNITS BUILT AFTER APRIL 2010

1

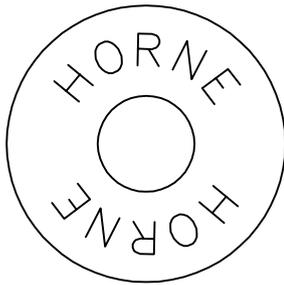


THIS INSTRUCTION SHEET IS ONLY APPLICABLE TO TSV1 PRODUCTS BUILT AFTER APRIL 2010. THESE CAN BE IDENTIFIED BY THE PUSHBUTTON BEING MARKED WITH "HORNE" AS SHOWN ABOVE. IF THE PUSHBUTTON DOES NOT HAVE THIS MARKING THEN THESE INSTRUCTIONS DO NOT APPLY.

2

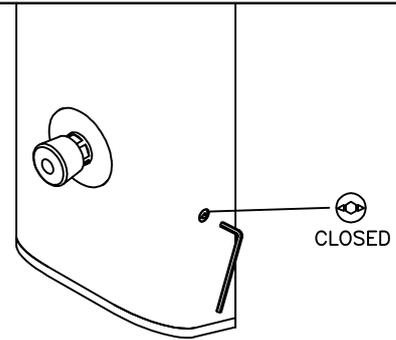


USE A HEX KEY TO ISOLATE THE HOT AND COLD WATER SUPPLIES AT THE LOW LEVEL SERVICING VALVES. THE INDICATOR ARROWS ON THE SERVICING VALVES WILL POINT TO THE FRONT AND THE BACK OF THE PANEL WHEN THE SUPPLIES ARE ISOLATED.

3

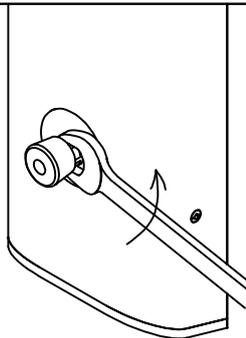


PRESS THE PUSHBUTTON TO RELEASE ANY TRAPPED PRESSURE. USING A SLIM JAW 24mm SPANNER ON THE HEX UNDER THE PUSHBUTTON, UNSCREW THE TIMED FLOW CONTROL CARTRIDGE.

4

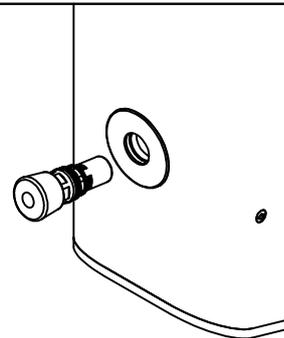


REMOVE THE TIMED FLOW CONTROL CARTRIDGE. BE CAREFUL NOT TO DROP THIS PRECISION PIECE OF EQUIPMENT. DO NOT PUT IT DOWN ANYWHERE WHERE IT COULD BECOME CONTAMINATED WITH DIRT OR DUST, NOR WHERE IT COULD BE STOOD ON.

5

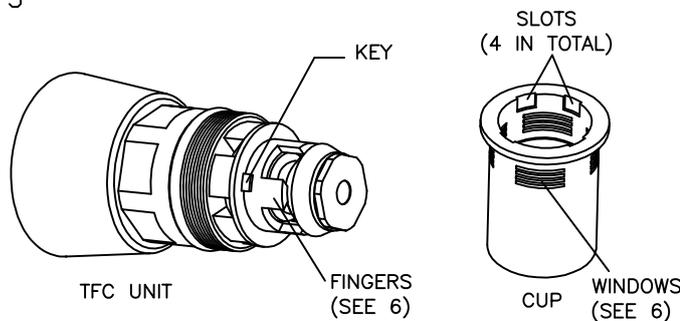


THE TFC UNIT HAS A KEY WHICH FITS INTO ONE OF 4 SLOTS IN THE CUP. THERE ARE THEREFORE 4 ORIENTATIONS OF THE TFC IN THE CUP. EACH OF THESE GENERATES A DIFFERENT FLOWRATE AND FLOW DURATION.

6

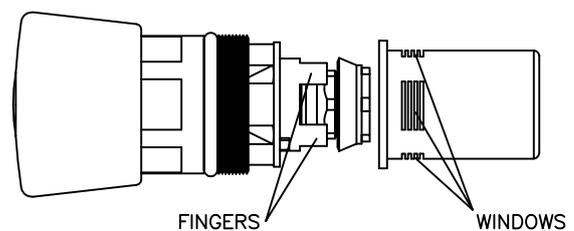


THE TFC UNIT HAS FINGERS WHICH BLANK OFF "WINDOWS" IN THE CUP WHEN ASSEMBLED. THE 4 ORIENTATIONS CORRESPOND TO 4 DIFFERENT DEGREES OF BLANKING. SECTION 7 SHOWS CLOSE-UP VIEWS OF THE WINDOWS AND EXPLAINS THE SIGNIFICANCE OF EACH ORIENTATION

7

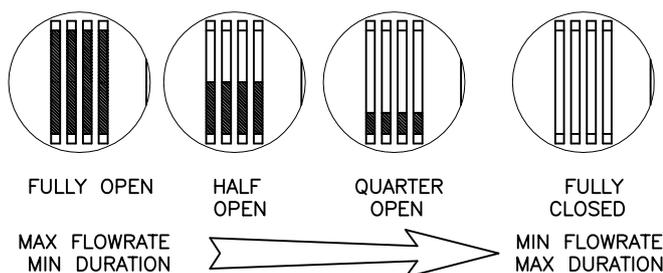


THE TFC UNIT HAS FINGERS WHICH COVER THE "WINDOWS" IN THE SIDE WALL OF THE CUP. SELECT THE MOST APPROPRIATE COMBINATION AS ABOVE, AND PUSH THE CUP ONTO THE CARTRIDGE.  
 NOTE: THE PRODUCT IS SHIPPED IN THE FULLY OPEN CONDITION.

8

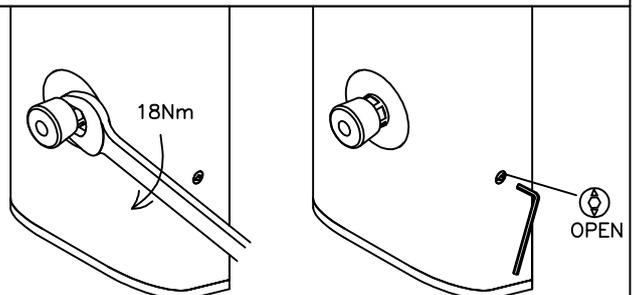


PUT THE CARTRIDGE BACK INTO THE SHOWER PANEL. TIGHTEN DOWN TO 18Nm. OPEN THE HOT AND COLD SUPPLIES AT THE SERVICING VALVES. THE INDICATOR ARROWS ON THE SERVICING VALVES WILL POINT UP AND DOWN WHEN THE SUPPLIES ARE OPEN. PUSH THE BUTTON TO PURGE THE AIR AND THEN VERIFY THE PERFORMANCE OF THE CARTRIDGE.

ADJUSTING FLOW DURATION THROUGH PISTON TRAVEL

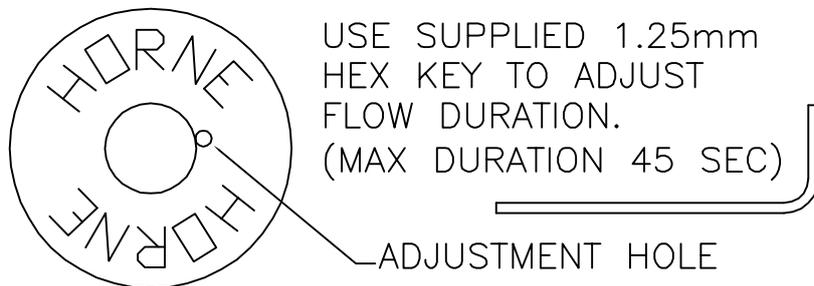

TURN CLOCKWISE TO REDUCE DURATION,  
ANTI-CLOCKWISE TO INCREASE DURATION.  
(ADJUSTS THE MAXIMUM PISTON STROKE).

CLEANING THE TIMED FLOW-CONTROL CARTRIDGE

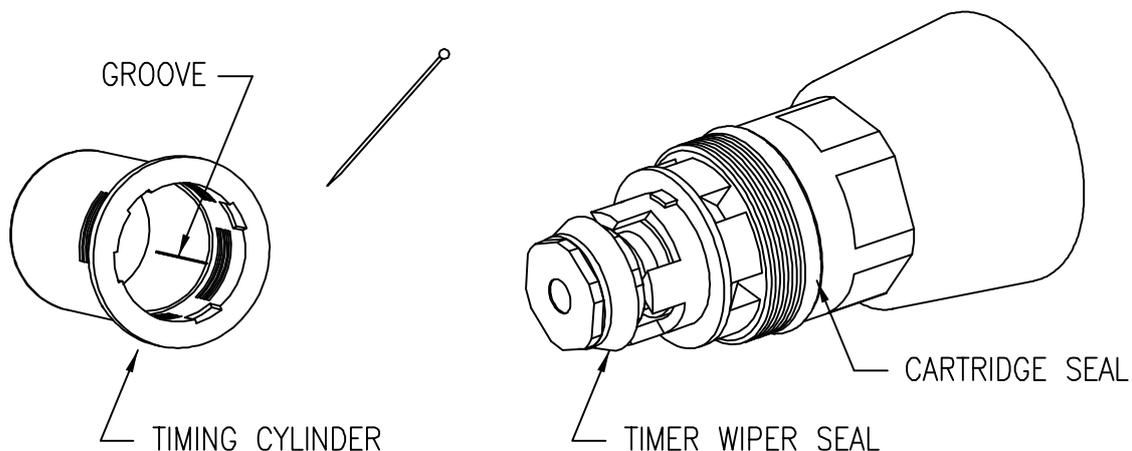

IF THE TFC CARTRIDGE BECOMES JAMMED (WON'T MOVE OUT TO CLOSED POSITION), REMOVE THE CARTRIDGE IN ACCORDANCE WITH STEPS 2-4, THEN PULL THE TIMING CYLINDER FROM THE CARTRIDGE ASSEMBLY. CLEAN OUT THE GROOVE INSIDE THE TIMING CYLINDER BY GENTLY RUNNING THE SHARP END OF A PIN UP AND DOWN THE GROOVE. A SMALL AMOUNT OF DEBRIS SHOULD BE DISLODGED BY THIS ACTION. THE TIMING CYLINDER MAY BE RINSED UNDER CLEAN RUNNING WATER - ABRASIVES SHOULD NOT BE USED.

ALL SEALS SHOULD BE FREE FROM DEBRIS AND DAMAGE. THEY MAY BE RINSED UNDER CLEAN RUNNING WATER. THE WIPER SEAL IS NOT USER REPLACEABLE - A NEW TFC SHOULD BE OBTAINED IF ANY DAMAGE IS APPARENT.

RE-ASSEMBLE AND INSTALL ACCORDING TO STEP 8.

COMMISSIONING, MAINTENANCE & IN-SERVICE TESTING RECORD

Establishment:					
Type of Valve: Horne TFC Shower with Horne 15 Thermostatic mixing valve		Date Installed:		Installed by:	
Location of Valve:					
<b>Commissioning Details</b> [Fill in ALL information during commissioning]					
Hot Water Supply :	HW Temp	°C	HW Pressure	Bar	Temp:
Cold Water Supply:	CW Temp	°C	CW Pressure	Bar	Pressure:
Instrumentation:					
Mixed Temp at max draw-off:	Mixed Temp:	°C	Flowrate at max draw-off:	l/min	
Mixed Temp at low draw-off:	Mixed Temp:	°C	Flowrate at low draw-off:	l/min	
Instrumentation Used:	Temp:		Press:	Flow:	
Cold Water Isolation Test	Max Mixed Water Temp during CW Isolation test: °C		Mixed Water Temp on restoration of CW Supply: °C		
Note: MWT should return within 2 degrees of set temp, and be no greater than 43°C after this test.					
Comments:					

<b>In-Service Testing Record</b>		Establishment:		Location of Valve:	
Date:		Type of Valve : <i>Horne 15 (within TFC shower panel)</i>			
Hot Water Supply :	HW Temp	°C	HW Pressure	Bar	Instrument used (temp):
Cold Water Supply:	CW Temp	°C	CW Pressure	Bar	Instrument used (pressure):
Mixed Temp at max draw-off:	Mixed Temp:	°C	Flowrate at max draw-off:	l/min	
Mixed Temp at low draw-off:	Mixed Temp:	°C	Flowrate at low draw-off:	l/min	
Instrumentation Used:	Temp:		Press:	Flow:	
Cold Water Isolation Test	Max Mixed Water Temp during CW Isolation test: °C    Mixed Water Temp on restoration of CW Supply: °C MWT should return within 2 degrees of set temp, and be no greater than 43°C after this test.				
Comments:				Recommended Date of Next In-Service Test:	

<b>In-Service Testing Record</b>		Establishment:		Location of Valve:	
Date:		Type of Valve : <i>Horne 15 (within TFC shower panel)</i>			
Hot Water Supply :	HW Temp	°C	HW Pressure	Bar	Instrument used (temp):
Cold Water Supply:	CW Temp	°C	CW Pressure	Bar	Instrument used (pressure):
Mixed Temp at max draw-off:	Mixed Temp:	°C	Flowrate at max draw-off:	l/min	
Mixed Temp at low draw-off:	Mixed Temp:	°C	Flowrate at low draw-off:	l/min	
Instrumentation Used:	Temp:		Press:	Flow:	
Cold Water Isolation Test	Max Mixed Water Temp during CW Isolation test: °C    Mixed Water Temp on restoration of CW Supply: °C MWT should return within 2 degrees of set temp, and be no greater than 43°C after this test.				
Comments:				Recommended Date of Next In-Service Test:	