

CHROMIUM PLATED
INLET TUBE (15MM COPPER)


SHOWERHEAD: HOT FORGED BRASS
(POLISHED CHROMIUM FINISH)

SHOWER SPRAYPLATE
(CHOICE OF 4 COLOURS)

ANODISED ALUMINIUM EXTRUSION
(NATURAL FINISH)

RECOMMENDED MOUNTING HEIGHT:
SPRAY-PLATE 1950MM FROM FINISHED FLOOR

SUPER-LIGHT ACTION
ACTUATOR PADDLE
(CHOICE OF 4 COLOURS)

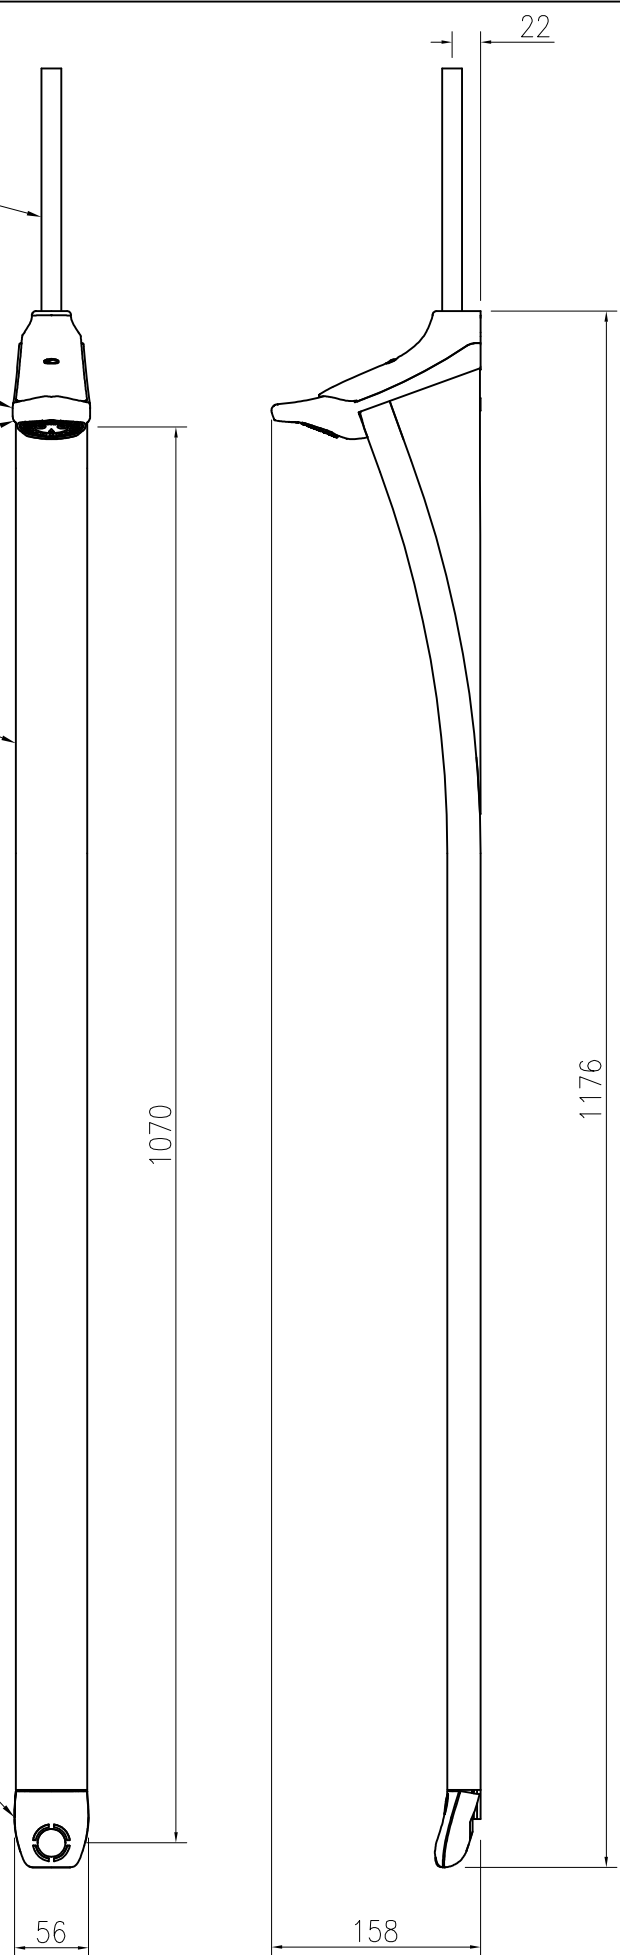

HORNE SLIMLINE TIMED-FLOW SHOWER PANEL	
SPRAYHEAD	ANTI-SCALE, 2 WAY
FLOW DURATION	30 SECONDS OR 1 MINUTE VERSIONS AVAILABLE
FLOW RATE	6, 8, OR 10 LITRES/MINUTE VERSIONS AVAILABLE
WATER INLET	BLENDED, 15mm COPPER PIPE THRU' TOP OF PANEL
THERMOSTATIC VALVE	NONE SUPPLIED, REQUIRES BLENDED WATER SUPPLY
USER CONTROLS	PUSH BUTTON TIMED FLOW CONTROL ONLY
STRAINER	INTEGRAL FINE MESH STRAINER
PARTS LIST 6029	CUSTOMER DRAWING 10397

FINISH: NATURAL ANODISED ALUMINIUM

HORNE ENGINEERING LTD.
JOHNSTONE
RENFREWSHIRE

PRODUCT :
HORNE SLIMLINE SHOWER PANEL

SCALE	DO NOT SCALE
DRAWN	MJ 27/8/2012
CHECKED	
ISSUE	1

DR'G. No. 10397