

S110ALR SHOWER PANEL

HORNE SHOWER PANEL WITH LIGATURE RESISTANT TIMED FLOW CONTROL AND VANDAL RESISTANT SHOWER HEAD

Pre-plumbed within a white (RAL 9010) powder coated aluminium panel including push button timed flow control with ligature resistant bezel and vandal resistant shower head in chromium plated finish.

FOR USE WITH PRE-BLENDED WATER SUPPLY ONLY



FEATURES & BENEFITS


- Durable powder coated (RAL 9010) panel and robust fittings ensure long lifespan
- pressure tested pre-plumbed assembly
- Fixed vandal and ligature resistant shower head
 - * Large size spray plate
 - * Two directional spray settings
 - * Easy to clean and maintain
- Integral 8 L/min flow regulator for water and energy conservation
- Ligature resistant push button timed flow control for water and energy conservation (approx. duration 45 seconds)
- Highly suitable for retrofit applications
- Fast and easy installation
- Optional accessory:
 - Pipe cover in same profile as panel

This panel should be supplied with mixed water from a suitably sized Horne group mixing valve. Refer to the group TMV datasheet.



Certificate No. FM 1224

Dimensions in mm

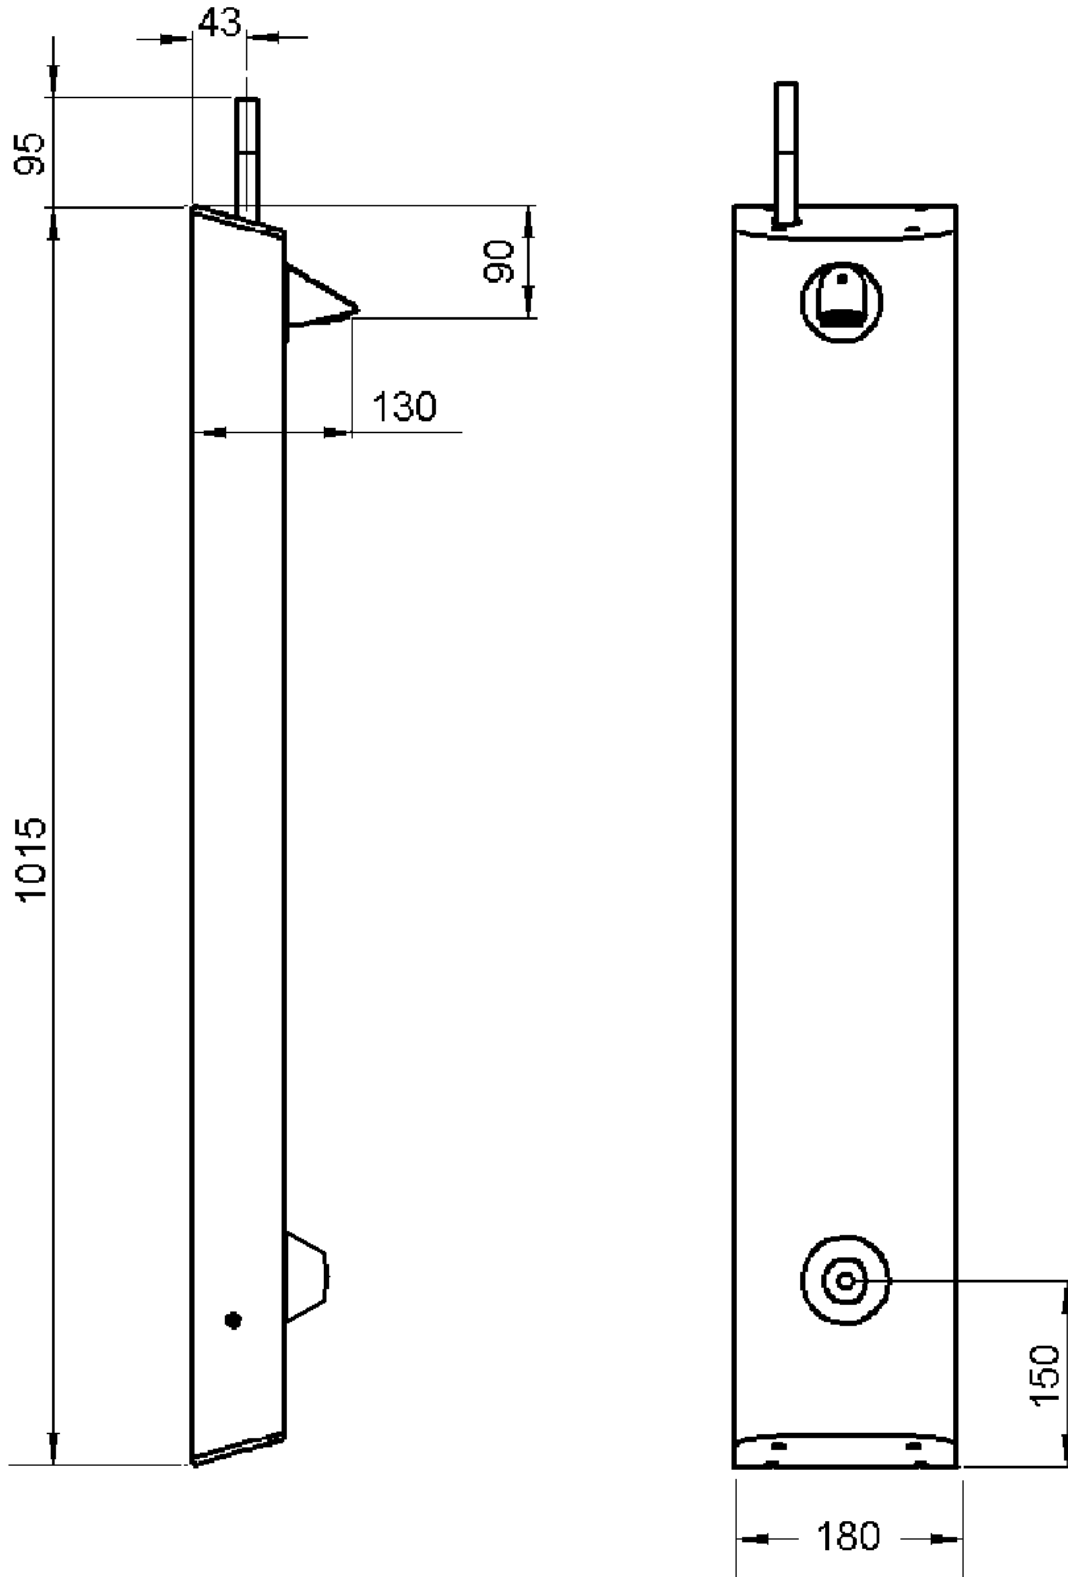

HORNE ENGINEERING LTD, P O BOX 7, Rankine Street, Johnstone, PA5 8BD.

Tel: + 44 (0)1505 321455 Fax: +44 (0)1505 336287 sales@horne.co.uk web:www.horne.co.uk