



### T605BLR DUAL MODE LIGATURE RESISTANT SHOWER PANEL with auto-divert

A ligature resistant, TMV3 Scheme Approved thermostatically controlled dual mode shower specially designed for unsupervised and assisted showering in high security hospitals, care homes and prisons. Water supplies via flexible Soft-PEX braided hose through rear of panel.

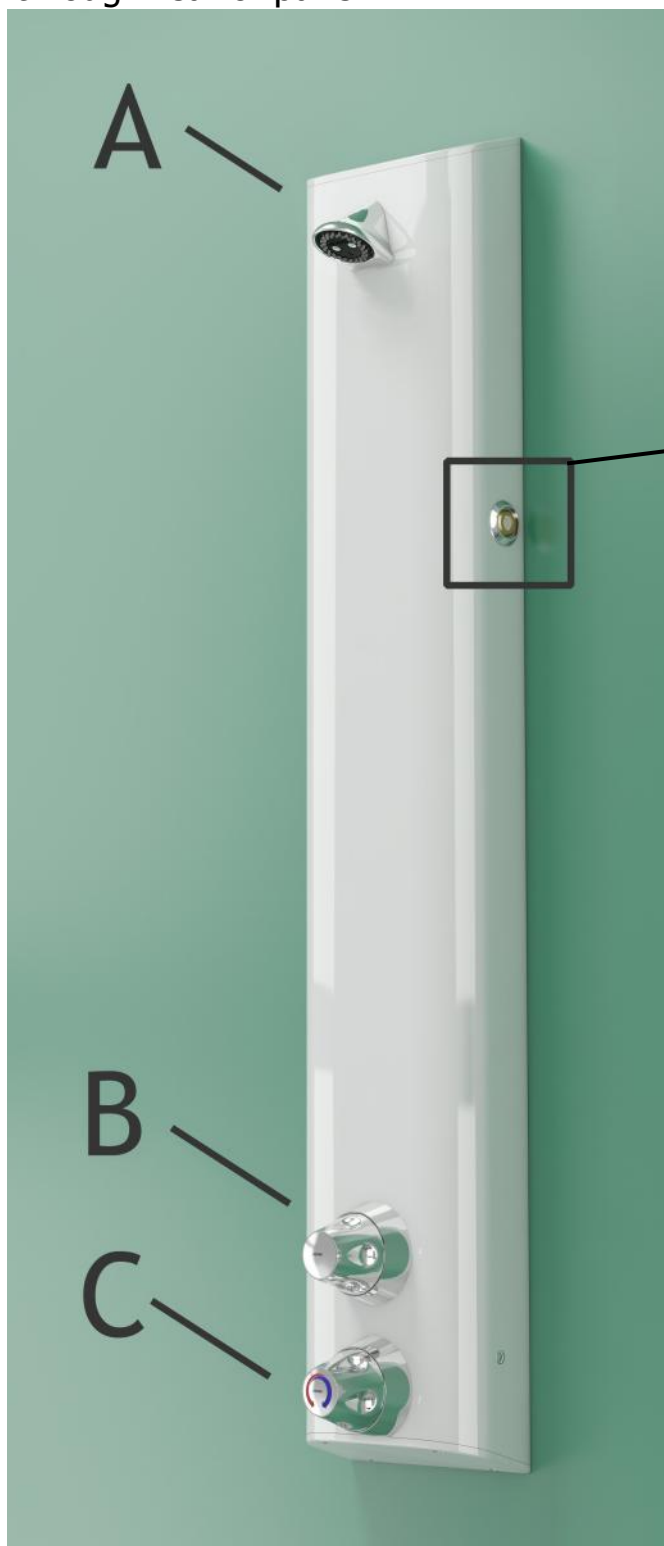

**Unsupervised mode:** The user is able bodied and does not require supervision during showering. The ligature and vandal resistant outlet (A) is active in this mode. Operation of the shower is by normal means using the ligature resistant flow control (B) to turn on the shower and temperature control (C) to adjust the temperature.

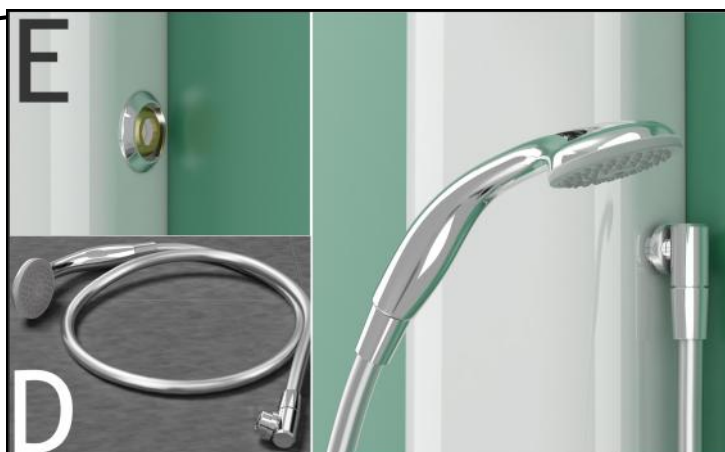

**Assisted mode:** For able and non able-bodied users who require assistance or supervision during showering. In this mode the carer/supervisor attaches the handset and hose (D) by screwing the hose connector into the ligature and vandal resistant outlet fitting (E) on the side of the panel. Water is automatically diverted to the handset on opening the shower flow control (B). The water temperature (C) is adjusted in the usual way.

To prepare for installation, note that the pipe centres are 100mm apart.

The TSV1-3 thermostatic shower valve is WRAS & TMV3 Scheme Approved.



Certificate No. FM 1224

### Features & Benefits

- Robust powder coated aluminium casing and vandal resistant fittings ensure long lifespan
- Performance and pressure tested pre-plumbed assembly
- Integral TMV3 Scheme Approved shower valve (see boxed insert)
- Robust dual controls with ligature resistant features
- Detachable 2m flexible hose with anti-kink feature
- Fixed vandal resistant shower head, easy to clean and maintain with large area spray plate and two directional spray settings
- Integral flow regulator for water and energy conservation, optimised flow 8-11 L/min
- Integral low level isolation service valves for ease of maintenance
- Suitable for retrofit applications
- Fast and easy installation



The integral TMV3 and WRAS approved thermostatic shower valve features:

- Integral and fine mesh strainers, which provide essential protection to the internal mechanism of the valve and ancillary fittings
- Angle pattern inlets enable easy access to the strainers
- Integral check valves prevent cross migration of water supplies
- Flushing facility to allow water supplies to be flushed clean during commissioning

### TSV1 Operating Conditions

Temp. setting at factory*	41°C
Range of hot water supply temp.	55 - 85°C
Minimum differential between hot water temp. and mixed water temp.	5°C
Maximum static pressure	10 bar
Range of maintained water supply pressures	2 - 5 bar

\* Temperature must be checked after installation

*Unequal pressures are usually acceptable if gravity-pressure supplies one of the inlets: minimum pressure 0.2 bar. When both supplies are pumped, pressures should be nominally balanced.*

### Specification Clause

HORNE T6058BLR LIGATURE RESISTANT DUAL MODE SHOWER PANEL WITH THERMOSTATIC SHOWER VALVE AND AUTO DIVERT:

Includes integral HORNE TSV1-3 Thermostatic Shower Valve pre-plumbed within a white (RAL 9010) powder coated aluminium panel. Unsupervised mode: shower controls and outlet fitting with ligature resistant features. Assisted showering mode: ligature resistant shower controls and detachable 2m hose with single function handset. Hose and handset to be accessible to and by authorised personnel only. Product reference **T605BLR** as per drawing No. D10381. To be installed according to the manufacturer's instructions and commissioned in accordance with water regulations and by-laws using the Horne TSV1 Flushing kit.