

# HORNE®

## Product datasheet: T306T4

HORNE THERMOSTATIC SHOWER PANEL WITH PUSH BUTTON TIMED FLOW CONTROL, SWIVEL SHOWER HEAD, ILTDU AND PIPE COVER

Includes integral Type 3 approved HORNE 15 thermostatic mixing valve pre-plumbed within a white epoxy-polyester powder-coated aluminium panel with push button timed flow control, single function swivel shower head in chromium plated finish, integral **In-line Thermal Disinfection Unit** and 465mm Pipe Cover.



### FEATURES & BENEFITS

- Durable, anodised and powder-coated (RAL 9010) panel and robust fittings ensure long lifespan
- Fully pressure and performance tested pre-plumbed assembly
- Integral healthcare approved Horne 15 thermostatic mixing valve
- In-Line Thermal Disinfection Unit with easy operation for periodic disinfection of pipe-work, valve and downstream fittings using local hot water supply
- 465mm Pipe Cover in same profile as panel with key access point for ILTDU operation
- Fixed, single function swivel shower head - easy to clean and maintain with large spray pattern
- Integral 8 L/min flow regulator for water and energy conservation
- Push button timed flow control for water and energy conservation. Approx. duration 45s
- Low level integral servicing valves for ease of maintenance and performance testing
- Highly suitable for retrofit applications
- Fast and easy installation

The Horne 15 thermostatic mixing valve is Type 3 and UK Water Reg 4 Approved.  
The integral ILTDU is UK Water Reg 4 Approved.



The **T306T4** shower panel is pre-plumbed with Type 3 approved Horne 15 thermostatic mixing valve, which features:

- Low level servicing valves
- Integral fine mesh strainers provide essential protection to internal mechanism of the valve and ancillary fittings
- Angle pattern inlets enable easy access to the strainers
- Integral check valves prevent cross migration of water supplies
- Flushing facility to allow water supplies to be flushed clean during commissioning


### Operating Conditions (Type 3 TMV):

- Pre-set mixed water temperature, 41°C at the shower head
- Range of hot water supply temperature: 55 — 65°C
- Maximum static pressure: 10 bar
- Minimum differential between hot water temp. and mixed water temp.: 5°C
- Range of maintained water supply pressures: 0.5 - 5 bar

*Unequal pressures are usually acceptable if gravity-pressure supplies one of the inlets: minimum 0.5 Bar. When both supplies are pumped, pressures should be nominally balanced.*

Dimensions in mm

Original Drawing Ref: 11374

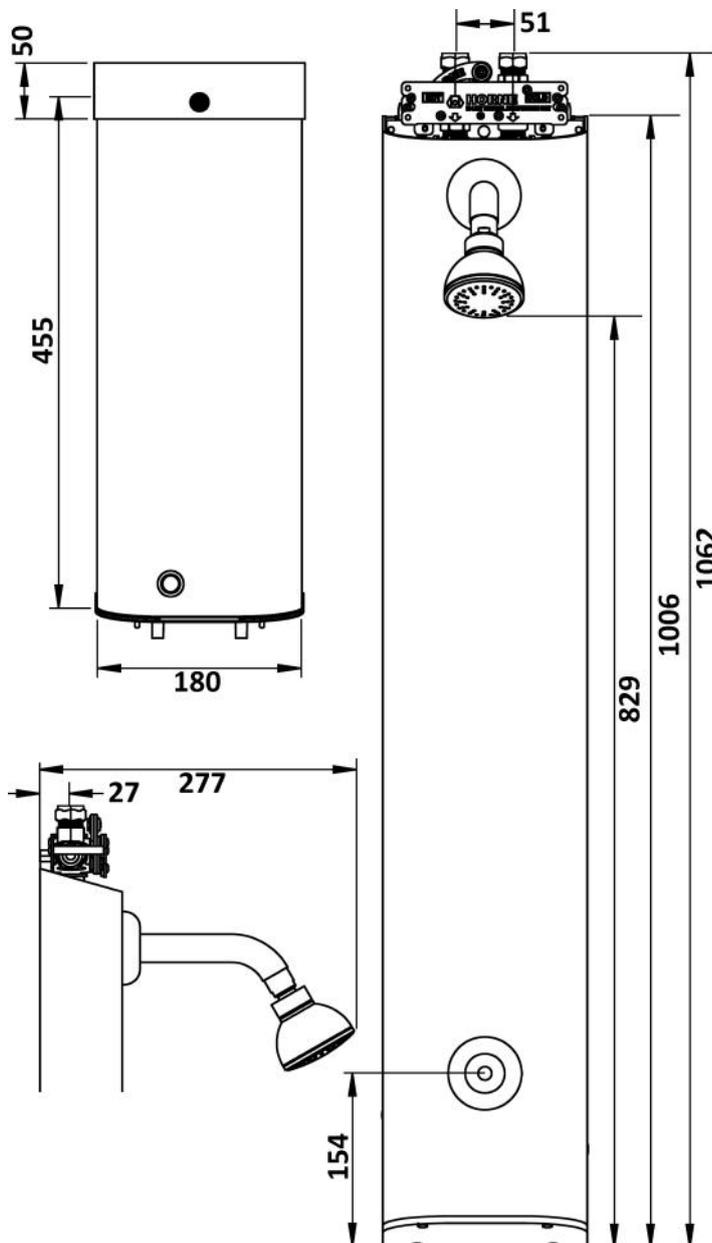

TOTAL HEIGHT OF PANEL + PIPECOVER  
= 1006 + 2 + 455 + 50 - (OVERLAP)

- OVERLAP IS VARIABLE, 20-40MM
- 455 LENGTH CAN BE CUT TO SUIT

### Thermal Disinfection using the ILTDU

For an explanation of its operating principals and further information on the recommended disinfection procedure, please refer to our ILTDU brochure and instructions.