

# HORNE®

Product datasheet:  
T206T91L

HORNE THERMOSTATIC SHOWER PANEL WITH TIMED FLOW CONTROL, TEMPERATURE CONTROL, SWIVEL SHOWER HEAD, ILTDU AND PIPE COVER  
Includes integral Type 3 Approved thermostatic shower valve pre-plumbed within a white powder-coated aluminium panel with push-button timed flow control, lever temperature control, fixed swivel shower head in chromium plated finish, integral **In-line Thermal Disinfection Unit** and 940mm Pipe Cover.



## FEATURES & BENEFITS

- Durable, anodised and powder-coated (RAL 9010) panel and robust fittings ensure long lifespan
- Fully pressure and performance tested pre-plumbed assembly
- Integral healthcare-approved shower valve with user temperature control lever
- In-Line Thermal Disinfection Unit with easy operation for periodic disinfection of pipework, valve and downstream fittings using local hot water supply
- 940mm Pipe Cover in same profile as panel with key access point for ILTDU operation
- Fixed, single function swivel shower head - easy to clean and maintain with large spray pattern
- Integral 8 L/min flow regulator for water and energy conservation
- Push button timed flow control for water and energy conservation. Approx. duration 45s
- Low level integral servicing valves for ease of maintenance and performance testing
- Highly suitable for retrofit applications
- Fast and easy installation

The TSV-TFC thermostatic shower valve is Type 3 and UK Water Reg 4 Approved.  
The integral ILTDU is UK Water Reg 4 Approved.



The **T206T91L** shower panel is pre-plumbed with an integral thermostatic shower valve, which features:


- Low level isolating servicing valves
- Integral fine mesh strainers provide essential protection to internal mechanism of the valve and ancillary fittings
- Angle pattern inlets enable easy access to the strainers
- Integral check valves prevent cross migration of water supplies
- Flushing facility to allow water supplies to be flushed clean during commissioning

### Operating Conditions (Type 3 TMV):

- Range of temperature adjustment up to pre-set maximum, usually 41°C at the shower head
- Range of hot water supply temperature: 55 — 65°C
- Maximum static pressure: 10 bar
- Minimum differential between hot water temp. and mixed water temp.: 5°C
- Range of maintained water supply pressures: 0.5 - 5 bar

*Unequal pressures are usually acceptable if gravity-pressure supplies one of the inlets: minimum 0.5 Bar. When both supplies are pumped, pressures should be nominally balanced.*

Dimensions in mm

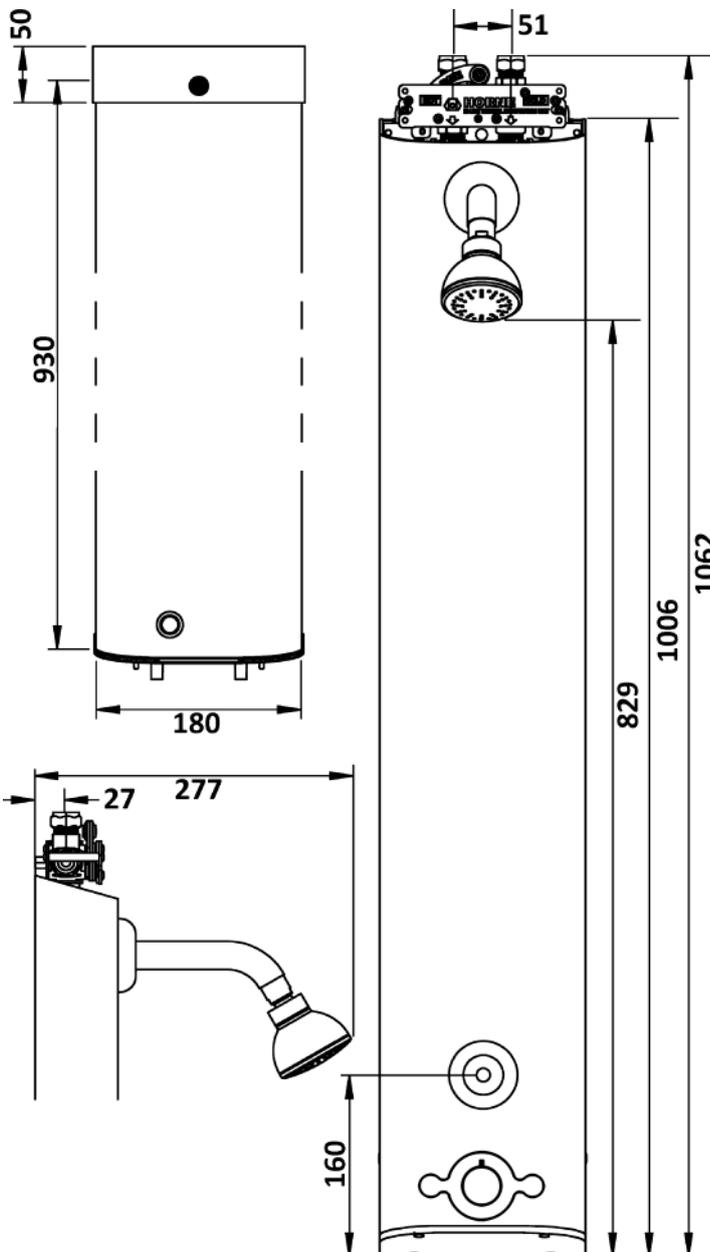

TOTAL HEIGHT OF PANEL + PIPECOVER  
= 1006 + 2 + 930 + 50 - (OVERLAP)

- OVERLAP IS VARIABLE, 20-40MM
- 930 LENGTH CAN BE CUT TO SUIT

### Thermal Disinfection using the ILTDU

For an explanation of its operating principals and further information on the recommended disinfection procedure, please refer to our ILTDU brochure and instructions.