

HORNE®

Product datasheet: T113A1L

HORNE SHOWER PANEL WITH TEMPERATURE CONTROL LEVER ADJUSTMENT, TIMED FLOW CONTROL AND VANDAL RESISTANT SHOWER HEAD

Includes integral Type 3 Approved thermostatic shower valve pre-plumbed within a white powder-coated aluminium panel with push button timed flow control, lever temperature control and vandal resistant shower head in chromium plated finish.





FEATURES & BENEFITS

- Durable, anodised and powder coated (RAL 9010) panel and robust fittings ensure long lifespan
- Fully pressure and performance tested pre-plumbed assembly
- Integral healthcare-approved thermostatic shower valve
- Fixed vandal resistant shower head
 - * Large area spray plate
 - * Two directional spray settings
 - * Easy to clean and maintain
- Integral 8 L/min flow regulator for water and energy conservation
- Lever operated temperature control
- Push button timed flow control for water and energy conservation (approx. duration 45 seconds)
- Low level integral isolating valves for ease of maintenance
- Highly suitable for retrofit applications
- Fast and easy installation
- Optional Accessory:
 - * Pipe cover in same profile as panel

The TSV-TFC thermostatic shower valve is Type 3 and UK Water Reg 4 Approved.



Dimensions in mm

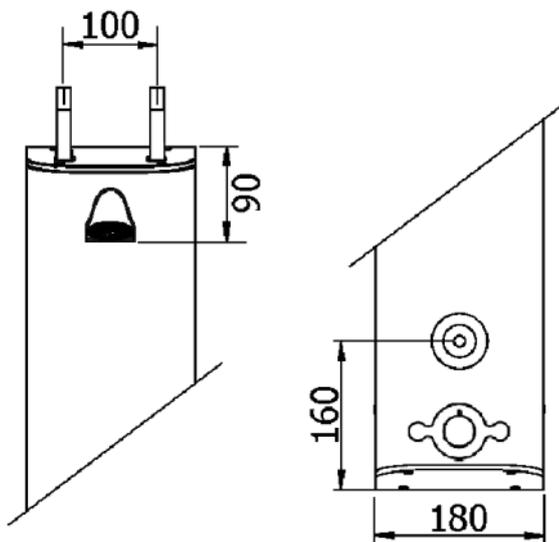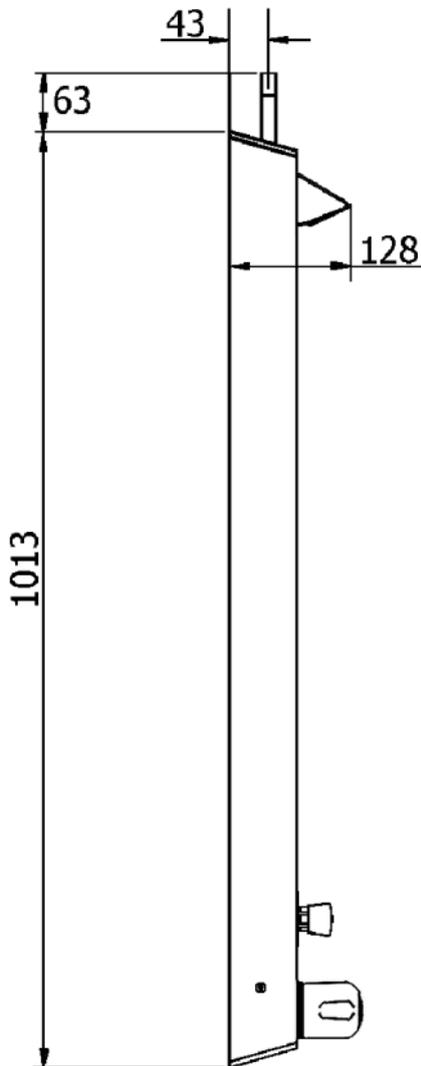

The T113A1L shower panel is pre-plumbed with an integral thermostatic mixing valve, which features:

- Low level isolating servicing valves
- Integral fine mesh strainers, which provide essential protection to the internal mechanism of the valve and ancillary fittings
- Angle pattern inlets enable easy access to the strainers
- Integral check valves prevent cross migration of water supplies
- Flushing facility to allow water supplies to be flushed clean during commissioning

Operating Conditions:

- Mixed water temperature preset to 41°C
- Range of hot water supply temperature: 55 – 65°C
- Maximum static pressure: 10 bar
- Minimum differential between hot water and mixed water temperatures: 5°C
- Range of maintained water supply pressures: 0.5 – 5 bar

Unequal pressures are usually acceptable if gravity-pressure supplies one of the inlets: minimum 0.5 Bar. When both supplies are pumped, pressures should be nominally balanced.

HORNE ENGINEERING LTD, P O BOX 7, Rankine Street, Johnstone, PA5 8BD.
Tel: +44 (0)1505 321455 Fax: +44 (0)1505 336287
Email: sales@horne.co.uk web: www.horne.co.uk



Certificate No. FM 1224