

### HORNE THERMOSTATIC SHOWER PANEL WITH TIMED FLOW CONTROL, TEMPERATURE CONTROL, SWIVEL SHOWER HEAD, ILTDU AND PIPE COVER

Includes integral thermostatic shower valve pre-plumbed within a white powder coated aluminium panel with push-button timed flow control, lever temperature control, fixed swivel shower head in chromium plated finish, integral In-line Thermal Disinfection Unit and 465mm Pipe Cover.



### FEATURES & BENEFITS

- Robust, anodised and powder coated (RAL 9010) panel and fittings ensure long lifespan
- Integral thermostatic shower valve with user temperature control lever
- In-Line Thermal Disinfection Unit with easy operation for periodic disinfection of pipe-work, valve and downstream fittings using local hot water supply
- 465mm Pipe Cover in same profile as panel with key access point for ILTDU operation
- Fixed, single function swivel shower head - easy to clean and maintain with large spray pattern
- Integral 8 L/min flow regulator for water and energy conservation
- Push button timed flow control for water and energy conservation. Approx. duration 45s
- Low level integral servicing valves for ease of maintenance and performance testing
- Highly suitable for retrofit applications
- Fast and easy installation
- Full assembly factory pressure tested to 16 bar

The **T206T41L** shower panel is pre-plumbed with an integral thermostatic shower valve, which features:

- Low level isolating servicing valves
- Integral fine mesh strainers provide essential protection to internal mechanism of the valve and ancillary fittings
- Angle pattern inlets enable easy access to the strainers
- Integral check valves prevent cross migration of water supplies
- Flushing facility to allow water supplies to be flushed clean during commissioning

### Operating Conditions:


- Range of temperature adjustment up to pre-set maximum, usually 41°C at the shower head
- Range of hot water supply temperature: 52 — 85°C
- Maximum static pressure: 10 bar
- Minimum differential between hot water temp. and mixed water temp.: 5°C
- Range of maintained water supply pressures: 0.4-5 bar

*Unequal pressures are usually acceptable if gravity-pressure supplies one of the inlets: minimum pressure 0.4 Bar. When both supplies are pumped, pressures should be nominally balanced.*

### Thermal Disinfection using the ILTDU

For an explanation of its operating principals and further information on the recommended disinfection procedure, please refer to our ILTDU brochure and instructions.

Dimensions in mm

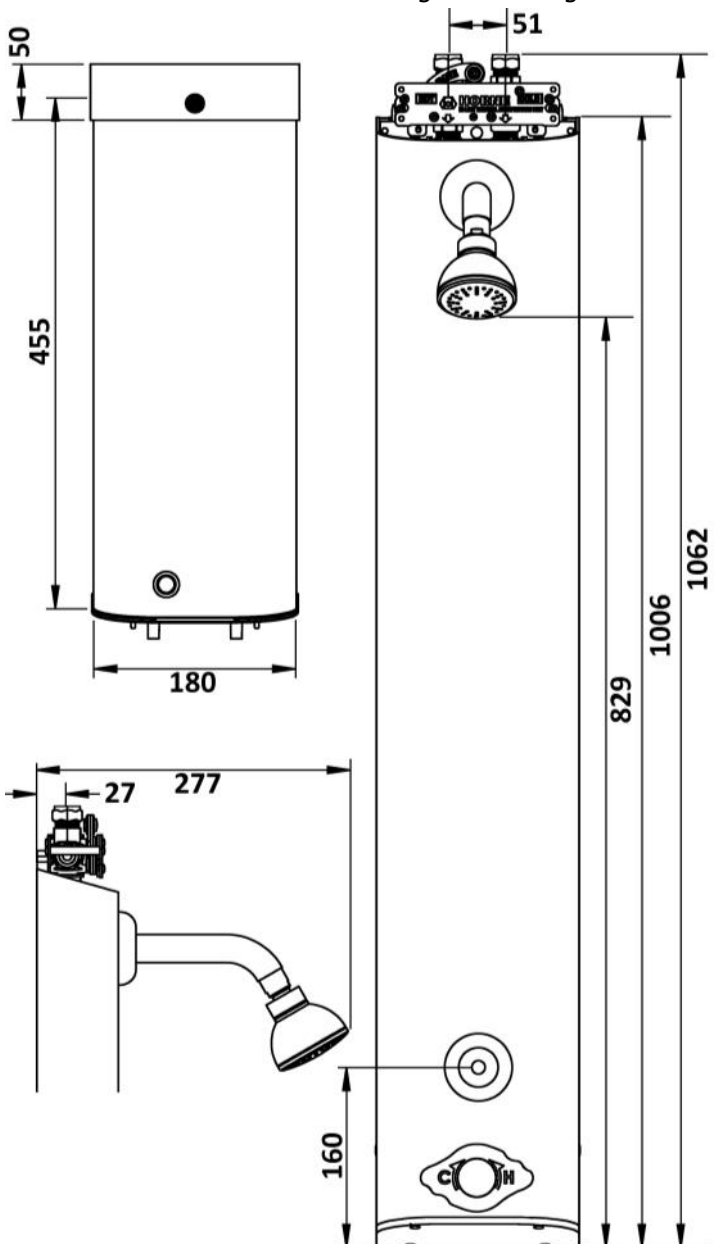

Original Drawing Ref: 11366

TOTAL HEIGHT OF PANEL + PIPECOVER  
= 1006 + 2 + 455 + 50 - (OVERLAP)

- OVERLAP IS VARIABLE, 20-40MM  
- 455 LENGTH CAN BE CUT TO SUIT

